

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number
WO 03/063467 A2

(51) International Patent Classification⁷: H04N 5/00

(21) International Application Number: PCT/JP03/00348

(22) International Filing Date: 17 January 2003 (17.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
NO. 2002-012833 22 January 2002 (22.01.2002) JP

(71) Applicant (for all designated States except US): CANON KABUSHIKI KAISHA [JP/JP]; 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MIYAMOTO, Katsuhiko [JP/JP]; c/o CANON KABUSHIKI KAISHA,

3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). YAMAMOTO, Takashi [JP/JP]; c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP).

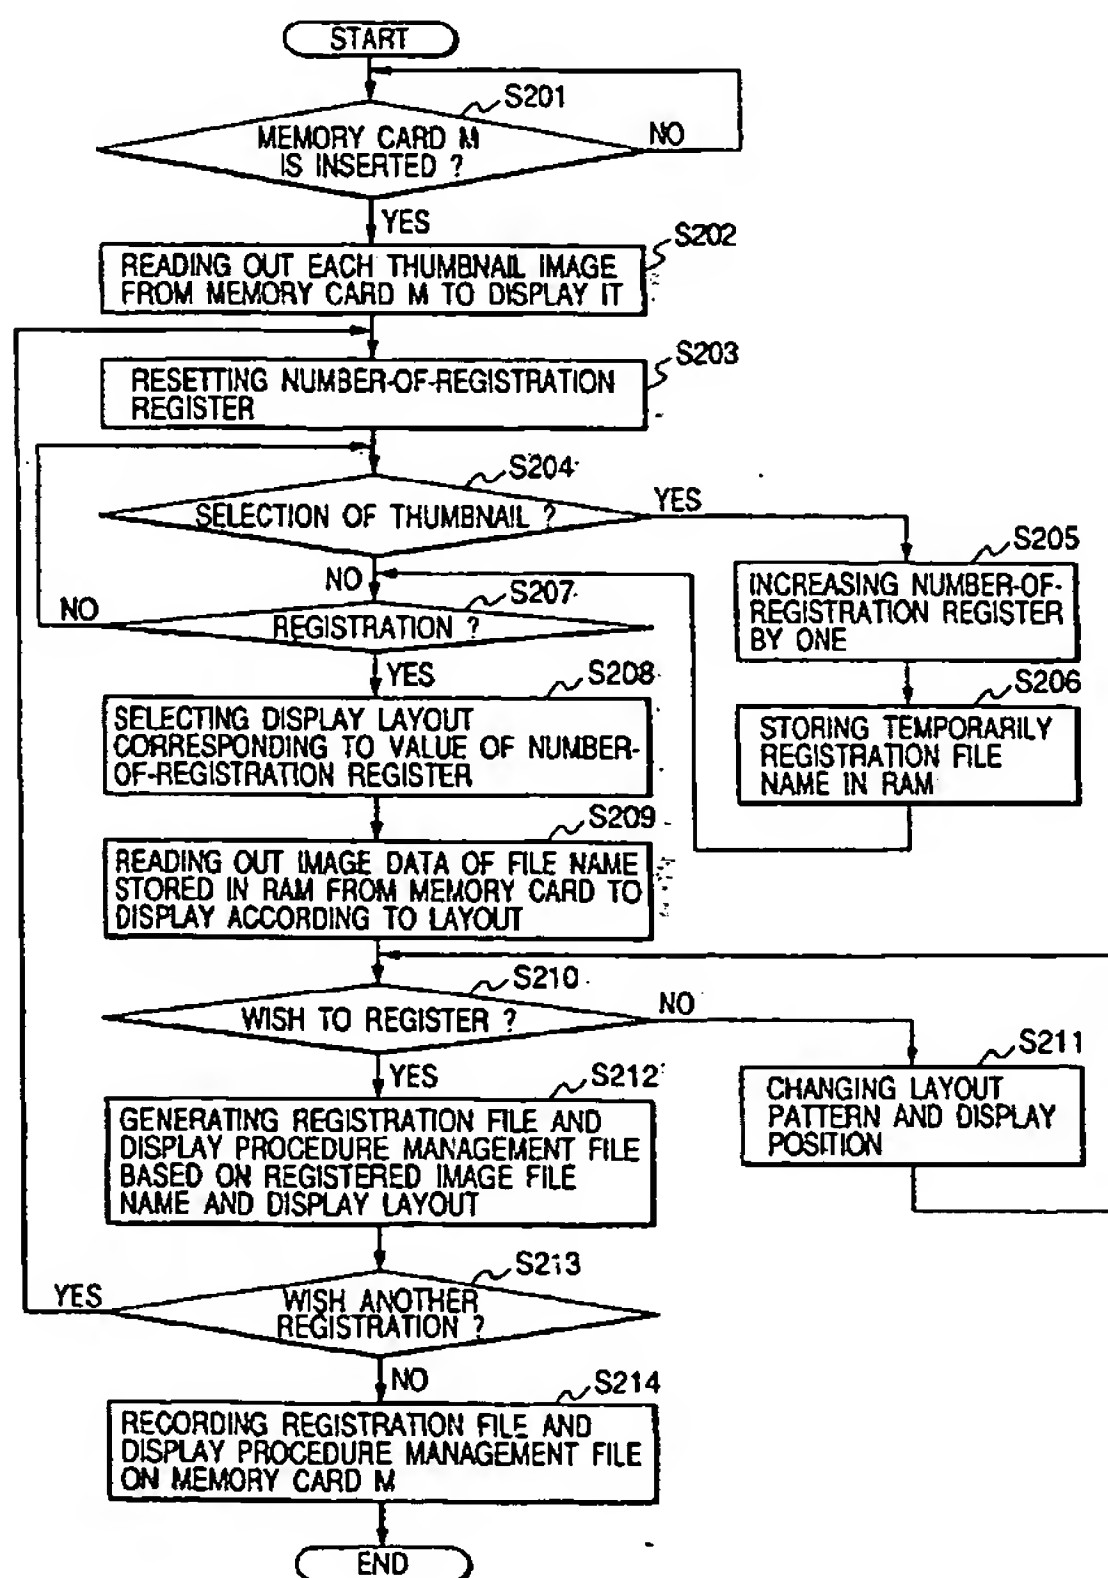
(74) Agents: OKABE, Masao et al.; No. 602, Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: IMAGE PROCESSING APPARATUS



(57) Abstract: ABSTRACT OF THE DISCLOSURE A signal processing apparatus, the operation of which is controlled by a remote controller, designates procedure for reproducing an image signal stored on a recording medium; allocates a reproduction function corresponding to the designated reproduction procedure to the operating key of the remote controller; generates reproduction management data that includes operating key information indicating the operating key to which the reproduction function is allocated, and reproduction procedure information indicating the designated reproduction procedure; and writes the reproduction procedure management information to the recording medium.

WO 03/063467 A2



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *without international search report and to be republished upon receipt of that report*

D E S C R I P T I O N

IMAGE PROCESSING APPARATUS

5 TECHNICAL FIELD

The present invention relates to a signal processing apparatus, and more particularly to the setting up of procedure for the reproduction of image signals.

10

BACKGROUND ART

A digital broadcasting system has been developed that can transmit multiplexed digital video and audio information and data broadcasting
15 information (including still image data), and can display data with synchronization between the video data and the audio data.

For example, with the BS digital broadcasting system employed in Japan, a stream of digital video
20 data and audio data is compressed and encoded using MPEG-2 to provide an MPEG-2 transport stream, which is transmitted as packets. Furthermore, still image data, such as advertisement data, are compressed and encoded in accordance with the JPEG standards to be
25 formed into packets, and these packets are repetitively transmitted using the Data Carousel method.

A television receiver separates the packet data into video data, audio data and data broadcasting data, and decodes the video and audio data to obtain the original images and sounds. In addition, the
5 television receiving apparatus decodes the data broadcasting data in accordance with its form.

Also, a high vision compatible plasma television, having a display resolution equal to or higher than 1280×720 pixels, has been produced as a
10 display device to be used for the television receiver, and the display resolution and the number of bits (the pixel values) are diversifying.

As apparatuses for handling video signals, digital cameras that employ CCDs to obtain images
15 have taken the place of conventional silver halide photographic cameras and have been practically employed. Since the digital camera stores, as digital data, images obtained into memory media, such as semiconductor memories, and since such media can
20 be easily transported, image data stored therein can be easily transferred to personal computers for display or printing.

In addition, a digital television receiver is available that is equipped with a card slot into
25 which a memory card, on which image data obtained by a digital camera are stored, can be inserted and that displays on a television screen images read out from

the memory card.

Furthermore, there may be a case wherein, for a system that employs a high-performance television that can receive a digital broadcast, to display
5 digital image data obtained by a digital camera, slides showing reproduction procedure, or a specific display layout, are arbitrarily set up and displayed.

However, even when the order for the display of such the slides is set up, the information for this
10 setup is not stored, and the setup must be repeated when digital image data stored on the same memory card are to be displayed by another television receiver.

That is, the display order, the display layout
15 and the remote control method must again be set up, and this is very tiresome requirement.

Further, since generally only one plane (a still image plane) of a video memory is used by a television receiver for the display of a still image,
20 the writing to video memory of the data of an image must be delayed until the display of a preceding slide has been completed. Therefore, each time slides are changed, the display of a new image is delayed by a time period required to write the next
25 slide data into the video plane.

As another vexing problem, since the management of the video planes of television receivers differ

depending on the broadcast reception standards adopted by individual nations, the worldwide display on televisions of digital image data, such as may be obtained by a specific digital camera, is not
5 possible.

DISCLOSURE OF THE INVENTION

It is one objective of the present invention to resolve the above described problems.

10 It is another objective of the present invention to enable the easy setup of the image signal reproduction procedure for an apparatus controlled by a remote controller.

To resolve the above problems and to achieve
15 these objectives, according to one aspect of the present invention, the present invention proposes a signal processing apparatus operated by a remote controller, comprising:

a designation unit arranged to designate the
20 reproduction procedure of image signals recorded on a recording medium;

a management data processing unit arranged to allocate, to an operating key of the remote controller, a reproduction function that corresponds
25 to the designated reproduction procedure, and generate reproduction procedure management information that include operating key information

which indicate the operating key to which the reproduction function is allocated, and reproduction procedure information which indicate the designated reproduction procedure; and

5 a recording unit arranged to record the reproduction procedure management information on the recording medium.

Other objectives and features of the present invention will become apparent during the course of
10 the following detailed description, given for the embodiments of the invention while referring to the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Fig. 1 is a diagram showing the configuration of a television broadcast receiving system according to a first embodiment of the present invention;

Fig. 2 is a flowchart for explaining the operation for setting up the procedure for the
20 reproduction of image data;

Fig. 3 is a diagram showing a display picture screen after the reproduction procedure is set up;

Fig. 4 is a diagram showing an example display layout;

25 Fig. 5 is a diagram showing the configuration of a remote controller;

Fig. 6 is a diagram showing the directories of

a memory card;

Fig. 7 is a diagram showing the contents of a registration file;

Fig. 8 is a diagram showing the contents of a
5 display procedure management file;

Fig. 9 which is composed of Figs. 9A and 9B, a flowchart showing the operation performed when slides are reproduced;

Fig. 10 which is composed of Figs. 10A and 10B,
10 a flowchart showing the operation performed when slides are reproduced; and

Fig. 11 is a diagram showing the essential configuration of a television receiver according to a second embodiment of the present invention.

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiments of the present invention will now be described while referring to the accompanying drawings.

20 Fig. 1 is a diagram showing the configuration of a digital television system according to a first embodiment of the present invention. In Fig. 1, digital television receivers (hereinafter referred to simply as receivers) 100 and 150 have the same
25 configuration, and are connected across the Internet I.

Also in Fig. 1, an antenna 101 is used to

receive a television signal transmitted by a
broadcast satellite or by a broadcasting radio wave,
such as a ground wave. A tuner 102 converts into a
digital signal a television signal received at the
5 antenna 101, demodulates modulated images and sounds,
and converts obtained video and audio data into an
MPEG-2 transport stream. A bus 103 is used to
transfer still image data and various control data.
A demultiplexer 104 separates a received transport
10 stream into compressed video data packets, compressed
audio data packets and data broadcast packets.

An AV decoder 105 decodes video signals and
audio signals obtained by the demultiplexer 104. A
graphic processing unit 106 converts the display
15 format (the number of pixels, the frame frequency, or
the scanning method) of video data received from the
AV decoder 105, or manages the plane of still image
data received from a CPU 109, via the bus 103, and
draws images to superimpose on the still image data
20 the video data received from the AV decoder 105.

A video memory 107 is used to store video data
and still image data displayed on a display device
108. The display device 108, on which video data is
displayed, includes a loudspeaker for outputting
25 television broadcast sounds. The CPU 109 controls
the individual sections of the receiver 100, and has
a function of decoding of compressed still image data

using software. Further, the CPU 109 incorporates a RAM for an execution of program and storing of temporary data.

A writable flash ROM 110 is used to store the
5 program used for the CPU 109 and data of a display resolution and the number of colors relative to each layout number, which will be described later. A card interface 111 is used to transfer data stored on a memory card M to the CPU 109. A storage unit 112
10 stores digital broadcast data and image data read out from the memory card M, and can be an arbitrary form, such as a hard disk drive, a DVD-RAM or a semiconductor memory.

An infrared ray receiving unit interface 113
15 receives infrared ray data from a remote controller 114 and converts that data into an electric signal. The remote controller 114 is employed by a user to select a graphics display button while watching the display screen of the display device 108 or to select
20 a television channel.

A modem router 115 permits the exchange of data between the Internet I and the receiver 100. This modem router 115 is changed depending on the infrastructure connected to the Internet I. For
25 example, when a cable is connected, the modem router 115 is a cable modem router, and when an ADSL (Asymmetric Digital Subscriber Line) using a

telephone line is connected, the modem router 115 is an ADSL modem router.

An explanation will now be given for an operation wherein the receiver 100 sets the procedure
5 for reproducing image data stored on the memory card M.

First, an explanation will be given for the processing wherein the receiver 100 sets up procedure for reproducing image data stored on the memory card
10 M, and stores the procedure on the memory card M.

Fig. 2 is a flowchart showing the processing performed by the CPU 109 of the receiver 100 when setting up the reproduction procedure.

In Fig. 2, when a reproduction procedure setting
15 process is instructed by the remote controller 114, first, the CPU 109 confirms that the memory card M is inserted into the memory card slot of the card interface 111 (step S201). Then, the CPU 109 reads out thumbnail image data from a digital image data
20 file stored on the memory card M, and transmits the thumbnail image data through the bus 103 to the graphic processing unit 106. The graphic processing unit 106 generates the display picture screen in Fig. 3, based on the thumbnail image data, and transmits
25 the display picture screen to the display device 108 (step S202).

The structure of a file on the memory card M is

shown in Fig. 6. Under a route directory 601 of the memory card M, there are directories DCIM 602 and LAYOUT 607, and under the DCIM 602, there are several sub-directories 603, 604 and 605. Under each of the
5 sub-directories 603 to 605, there are image files 606, which include video and audio data obtained by a digital camera or a digital video camera, and thumbnail image data. A plurality of image files 606 may be located under the directory 603 or may be
10 located under the other directories 604 and 605.

Fig. 3 is a diagram showing an example picture screen display of thumbnail images. In this embodiment, as is shown in Fig. 3, a list of thumbnail images 301 to 308 of image data read out
15 from the memory card M is displayed, and a cursor frame is provided to highlight one of the displayed thumbnail images. In the example in Fig. 3, the added cursor frame is positioned around the image 305; however, by manipulating the direction keys on
20 the remote controller 114, a user can move the cursor frame in four directions of up, down, right and left.

Fig. 5 is a diagram showing an example configuration for the remote controller 114. In Fig. 5, the remote controller 114 comprises a power key
25 501, direction keys 502, a decision key 503, a menu key 504 and number keys 505.

The key code of an operating key manipulated on

the remote controller 114 is output by the remote controller 114 and received by the infrared ray receiving interface 113, and is then transmitted to the CPU 109. The CPU 109 identifies the key code (up,
5 down, right or left) and, in accordance with the key code, transmits to the graphic processing unit 106 drawing data which includes the cursor frame that is moved.

When the list of thumbnail images 301 to 308 is
10 displayed in this manner, the CPU 109 resets the value held by the internal number-of-registration register (step S203).

Then, when the decision key 503 on the remote controller 114 is manipulated, it is ascertained that
15 the thumbnail image whereat the cursor frame is currently positioned is selected (step S204) and the value held by the number-of-registration register is incremented by one (step S205). Subsequently, the file name of the still image corresponding to the
20 selected thumbnail image is temporarily stored in the internal RAM (step S206).

Following the manipulation of the decision key 503, the CPU 109, controls the graphic processing unit 106 to display a thick frame for the selected
25 thumbnail image to indicate that a selection is made, and to display a message 309, "Wish to register?". In Fig. 3, the images 301 and 303 are selected, and

the message 309 is displayed.

When a user who has completed the selection of all desired thumbnail images moves the cursor to the location of the message 309 and manipulates the decision key 503, the CPU 109 reads out from the RAM the value held by the number-of-registration register, selects a display layout that corresponds to the value, and reads banner information from the flash ROM 110 (steps S207 and S208). Furthermore, the CPU 109 reads out from the memory card M the image data of the file name stored in the RAM, and transmits the image data to the AV decoder 105. Thereafter, the AV decoder 105 decodes the image data and outputs the thus obtained data to the graphic processing unit 106, and the graphic processing unit 106 displays that image data in accordance with the selected display layout (step S209). The CPU 109 further transmits to the graphic processing unit 106 the image data of a confirmation screen that is used to determine whether an image should be registered, to display the image data.

Fig. 4 is a diagram showing an example registration screen for the display layout.

For example, when the thumbnail images 301, 303 and 305 in Fig. 3 are selected, the number of registered screens is three. And since the number of registered picture screens is three, the CPU 109

selects, from among multiple sets of display layout data that are stored in the flash ROM 110, one of display layout data for which the number of displayed picture screens is three. In Fig. 4, a display
5 layout is selected wherein, to display on the screen the images selected in Fig. 3, the two images 301 and 303 are arranged at upper positions 401 and 402 and the image 305 is arranged at a lower position 403.

In Fig. 4, buttons 406 and 407, together with a
10 message 408 of "Wish to register display layout?", are displayed, and a user, upon deciding that the current display layout is satisfactory, employs the remote controller 114 to move the focus to the button 406 and manipulates the decision key 503 (step S210).

15 When, however, the user decides that the display layout is not satisfactory, he or she employs the remote controller 114 to move the focus to the button 407 and manipulates the decision key 503. The CPU 109 then selects, from among the display layout
20 data stored in the flash ROM 110, an other one of the layouts for which the number of display picture screens is three, and controls the graphic processing unit 106 to use this layout for the display of the images (step S211).

25 In this embodiment, as is shown in Fig. 4, images 404, representing display layout choices are displayed on a confirmation screen. In the example

in Fig. 4, four different layouts 1 to 4 are provided as display layout choices, and layout 2 is selected. Under these conditions, each time the button 407 is manipulated the CPU 109 reads out layout data for the
5 next choice from the flash ROM 110, and changes the display picture screen. Furthermore, the display images can be replaced, and when a user moves the focus to one of the display images 401, 402 or 403, and manipulates the decision key 503, the image at
10 the current display position can be replaced by an image at a different display position.

In this embodiment, when images are displayed in accordance with each display layout, images 405 are also displayed that represent functions allocated
15 to the operating keys of the remote controller 114 to controlling the display operation. Further, as will be described later, in this embodiment data for the operating key codes are generated for each display layout (slide).

20 When an instruction for the registration of a display layout is issued at step S210, the CPU 109 generates a registration file and a reproduction procedure management file on the basis of the registered file name and the selected display layout
25 data, as will be described later, and stores these files in the internal RAM (step S212).

Furthermore, when the registration of a display

layout is completed, the CPU 109 displays, on the display device 108, a screen used for determining whether the setting of the image data reproduction procedure using another display layout should be continued. When it is ascertained that the setting of the reproduction procedure should be continued, program control returns to step S203 and the above described processing is repeated.

When the setting of the reproduction procedure is to be terminated, the CPU 109 reads out the registration file and the reproduction procedure management file from the RAM, and controls the card interface 111 to write these files in the LAYOUT directory 607 of the memory card M (step S214).

In this embodiment, as is shown in Fig. 6, a registration file 608 and a display procedure management file 609 are stored in the LAYOUT directory 607.

Figs. 7 and 8 are diagrams showing the structures of the registration file and the display procedure management file.

In Fig. 7, the registration file is constituted with two sections, HDR and BASE, and multiple sets of parameter data are stored in each section.

Multiple BASE sections are present for each registered image file.

For example, in the registration file in this

embodiment, as is shown in Fig. 7, a registration file ID, a file length, the number of sections and the number of parameters are written into the HDR section.

5 The BASE section includes a file name representing a registered image file, a registration file directory indicating a directory in the memory card M whereat an image file is present, a layout No. for displaying a registered image, a slide group ID
10 representing a slide constituting one picture wherein a registered image is displayed, a slide position No. representing the display position of a registered image on the slide, flag data used to indicate whether an optional setting is designated, and,
15 optional information (X and Y data for the display position of a registered image, SX and SY data of the display size, and display color count data CO).

Normally, the display position is unconditionally defined with a layout No. that
20 represents the display layout; however, when the optional setting is designated, the display position, the size and the number of colors can be forcefully changed.

Each of the parameters may be formed either of
25 bits having a fixed length or of bits having variable lengths, and the structure is determined in advance by systems, or the CPUs of the systems adjust the

parameters to match the version management.

In Fig. 8, the display procedure management file is constituted with two sections, HDR and SLIDE. An ID representing the display procedure management
5 file, a file length, the number of sections and the number of parameters are written to the HDR section.

Parameters required for the constitution of a slide are written into the SLIDE section. In this embodiment, these parameters are a slide group ID for
10 designating a registered image file to be displayed on the slide, the number of registered files in the slide, the layout No. for the slide, and remote control code data that represent the reproduction functions of slides and the operational key codes for
15 the remote controller 114, to which the reproduction functions are allocated.

In this embodiment, each time the registration for one display layout (slide) is issued at step S210 in Fig. 2, the CPU 109 generates data for one SLIDE
20 section in Fig. 8, and controls a series of reproduction procedure based on each SLIDE section by using a reproduction procedure management file.

The reproduction operation performed in accordance with the thus designated reproduction
25 procedure will now be described.

Fig. 9 is a flowchart showing the reproduction operation performed by the CPU 109. When a slide

reproduction instruction is issued by the remote controller 114, the processing in Fig. 9 is started.

When the slide reproduction instruction is issued, first, the CPU 109 resets the registers and
5 variables in the internal RAM (step S901), and controls the card interface 111 to read out from the memory card M a registered file and a reproduction procedure management file and store these files in the internal RAM (step S902).

10 Then, in accordance with the value of a variable sn, indicating the current SLIDE section (this value is 0 because it is reset at the first), the CPU 109 detects, from among the SLIDE sections stored in the reproduction procedure management file
15 in Fig. 8, the slide group ID (GID) of the sn-th SLIDE section, and stores this slide group ID in the group ID register (step S903). The CPU 109 also detects the data of the layout NO. of this SLIDE section, and stores the layout NO. data in the layout
20 register (step S904).

Following this, in order to detect an image to be displayed on the display picture screen (slide) included in the SLIDE section, the CPU 109 detects the slide group ID from a bn-th BASE section in
25 accordance with the value of a variable bn indicating the BASE section in the registered file (step S905). Then, the CPU 109 compares this slide group ID with

the value of the GID stored in the group ID register (step S906). When these IDs have the same value, the CPU 109 ascertains that the current file is an image file to be displayed on the display picture screen in the pertinent SLIDE section, and reads out from the BASE section data such as the registered file name, the directory and the layout position and stores in the RAM (step S907).

Thereafter, the CPU 109 increments the variable bn by one (step S908), and compares the obtained bn value with a predetermined value SB-1, which is smaller by one than a number BN of BASE sections (step S909). When the bn value has not yet reached that of BN-1, program control returns to step S905 and the CPU 109 repeats the above processing.

Whereas when the bn value equals BN-1, the CPU 109 reads out an image file from the memory card M based on the data stored in the RAM at step S907, and the AV decoder 105 decodes the thus obtained data and transmits the decoded data to the graphic processing unit 106 (step S910).

Next, the CPU 109 generates a display picture screen based on the layout No. and the remote control data and transmits to the graphic processing unit 106 (step S911). At this time, the CPU 109 starts the incorporated timer.

A picture screen according to the first SLIDE

section in Fig. 8 is then displayed on the display device 108, and the CPU 109 determines whether the timer value exceeds a predetermined time T (step S912). When the predetermined time T has elapsed, 5 the CPU 109 increments the variable sn by one (step S913), and compares the obtained variable sn with a predetermined value SN-1, which is smaller by one than a number SN of SLIDE sections (step S914).

When the value of the variable sn has not yet 10 reached SN-1, the CPU 109 resets the internal timer (step S915) and returns to step S903, whereafter it repeats the above processing for the next SLIDE section. Otherwise, when the value of the variable sn equals SN-1, the CPU 109 ascertains that the 15 series of reproduction procedure has been completed for all the SLIDE sections and halts the display.

When at step S912 the predetermined time T has not yet elapsed, the CPU 109 determines whether the user manipulates the operating key that corresponds 20 to the stop function which is allocated as one of the key code data written in the SLIDE section (step S916). When the operating key corresponding to the stop function (e.g., a key 7 in Fig. 4) is manipulated, the timer is halted (step S917). At 25 this time, the display picture screen is unchanged, and the automatic switching the display picture screens according to passage of time is not performed.

Then, when an operating key corresponding to the start function (a key 5 in Fig. 4) is manipulated, the timer is restarted (steps S918 and S919).

Thereafter, when the operating key
5 corresponding to the restart function (a key 9 in Fig. 4) is manipulated, the CPU 109 resets the timer count value and returns to step S901 to repeat the above processing (steps S920 and S921). Therefore, when a restart instruction is issued, the series of
10 reproduction procedure according to the reproduction procedure management file is repeated from the beginning.

When an operating key corresponding to an end function (not shown in Fig. 4; however, this function
15 can be allocated for an arbitrary operating key on the remote controller 114) is manipulated, the CPU 109 halts the display operation, and terminates the processing. But when no operating key is manipulated, the CPU 109 returns to step S912 and repeats the
20 processing.

When, in accordance with the contents of the reproduction management file, the reproduction operation is controlled in this manner, the display picture screens can be automatically switched in
25 accordance with the display layout written in the individual SLIDE sections, and slide reproduction, whereby images recorded on the memory card M are

displayed, can be provided.

As is described above, according to this embodiment, when the procedure of the slide reproduction of image data stored on a memory card are to be designated, slide pictures are generated by automatically selecting one of display layouts that have been prepared in advance, in accordance with the number of display pictures selected by a user. Therefore, since the user need only select a desired image to be displayed, the procedure for the reproduction of slides can be easily set.

Further, since the reproduction functions corresponding to the individual slide pictures are allocated to the operating keys of the remote controller and this allocation is written into the reproduction procedure management file, the user who employs the remote controller for slide reproduction can easily identify the operating keys to which the reproduction functions have been allocated. As a result, various reproduction functions can be performed by using the remote controller.

Furthermore, in this embodiment, since the registered file which designates the image file to be used for slide reproduction, and the reproduction procedure management file which designates the procedure to be used for reproducing individual slides, are both stored on the memory card, even a

receiver other than the one for which the reproduction procedure is set up can employ that procedure to perform slide reproduction, without a new reproduction procedure setup being required.

5 A second embodiment will now be described.

 In the first embodiment, for the reproduction of each slide, the image data read out from the memory card are decoded and the decoded image data are written into the still image plane in the video
10 memory 107.

 When all the slide display data are to be displayed using only the still image plane, however, since the entire screen can not be displayed on the display device during the period in which image data
15 read out from the memory card are being written into the still image plane, the image display is essentially delayed.

 An explanation will now be given for a method whereby such a display delay period is reduced by
20 using multiple planes which are adopted based on the BS digital television broadcast receiver standards.

 The system configuration is the same as the one shown in Fig. 1, and the setting up of reproduction procedure and the contents of the registered file and
25 the reproduction procedure management file are also as previously described.

 Fig. 11 is a diagram showing the configuration

for a graphic processing unit 106, a video memory 107 and peripheral circuits.

In Fig. 11, a writing control unit 1101 controls the writing of data for each plane of the video memory 107. A scaling processing unit 1102 changes the size of image data received from an image decoding unit 1103, which mainly decodes still image file data. A switching unit 1104 selects either image data received from a moving image plane 1109 or image data received from a still image plane 1110, and outputs the selected image data. α blending units 1105 and 1107 control the levels of input data to synthesize images. And adders 1106 and 1108 add data received from a character and graphic plane 1112 to data received from a subtitle plane 1113.

The video memory 107 includes five planes of the moving image plane 1109, the still image plane 1110 and a moving image and still image switching plane 1111, the character and graphic plane 1112 and the subtitle plane 1113.

While referring to the flowchart in Figs. 10A and 10B, an explanation will now be given for the processing performed in this configuration to generate a display picture screen using the graphic processing unit 106 and the video memory 107.

Figs. 10A and 10B are flowcharts showing the reproduction operation of this embodiment. In Figs.

10A and 10B, mainly, the display picture screen generation is described, and no explanation is given for the display switching process using the timer count value, and the reproduction halting, starting
5 and restarting processes performed upon receiving instructions issued using the operating keys. However, the CPU 109 always monitors the timer count value and each instruction issued using an operating key, and employs an interrupt process to control the
10 operations.

In Figs. 10A and 10B, the processes at steps S1001 to S1010 are the same as those in Figs. 9A and 9B. As is described above, the image file to be used for the selected SLIDE section is determined, and as
15 at step S911, the CPU 109 detects the layout No. (step S1011). Then, the CPU 109 reads out from the flash ROM 110 the display resolution and the number of colors that correspond to the layout No. (step S1012).

20 Following this, a check is performed to determine whether the display resolution and the number of colors that are thus obtained are smaller than the display resolution and the number of colors that are available for the selected plane (e.g., the
25 still image plane 1110) (step S1013).

When the display resolution and the number of colors are smaller than those for the selected plane,

the image data read out from the memory card M are decoded. In this embodiment, the image decoding unit 1103 decodes the image file read out from the memory card M; however, as in the previous embodiment, the
5 AV decoder 105 may decode the image data and transmit the decoded image data to the scaling processing unit 1102, which may then change the size.

The scaling processing unit 1102 converts the image data obtained by the image decoding unit 1103
10 into the size defined by the layout No., and the writing control unit 1101 writes the obtained data to the selected plane (step S1014).

Further, the value of data to be written into the moving image and still image switching plane 1111,
15 the switching unit 1104 and the α blending units 1105 and 1107 are controlled so as to output the image data of the selected plane to the display device (step S1015).

The moving image and still image switching
20 plane 1111 has a depth of one bit and the same resolution (the same number of pixels) as the moving image plane 1109 and the still image plane 1110. When data bits "1" and "0" that are to be written into addresses corresponding to the individual pixels
25 are switched therebetween, the image data transmitted from the moving image plane 1109 or the image data transmitted from the still image plane 1110 is

selected and output by the switching unit 1104 for each pixel.

For example, when the image data transmitted from the still image plane 1110 is to be selected and output, the one bit data "0" is written into the address of a pixel corresponding to the image data portion. At this time, the α blending units 1105 and 1107 are so set that they can output the image data received from the switching unit 1104 without changing the data level.

Furthermore, when image data from the character and graphic plane 1112 are to be output, regardless of whether the image data from the moving image plane 1109 or the image data from the still image plane 1110 are selected by the switching unit 1104, the operation of the α blending unit 1105 is controlled so that the value of the data received from the switching unit 1104 is reset to 0, while the α blending unit 1107 is controlled so that the data received from the adder 1106 is output unchanged. As a result, the image data from the character and graphic plane 1112 can be output.

Next, the variable sn is incremented by one (step S1016), and the obtained variable sn is compared with a predetermined value SN-1. When the variable sn and the predetermined value SN-1 match, the processing is terminated (step S1017). When the

variable sn does not match SN-1, however, the plane into which image data is next to be written is changed (step S1021), and a check is performed to determine whether image data that has not yet been
5 displayed have already been written to the altered plane (step S1022). When the current plane is not empty, this plane is changed to another one, and the same decision process is performed. But when the current plane is an empty plane, program control
10 returns to step S1003 and the display picture screen is generated based on the next SLIDE section.

In this embodiment, when the currently selected plane is the moving image plane 1109 the still image plane 1110 is selected, and when the currently
15 selected plane is the still image plane 1110 the character and graphic plane 1112 is selected.

When at step S1013 the resolution and the number of colors designated according to a layout No. are greater than the resolution and the number of
20 colors for the selected plane, the image can not be displayed and the selected plane is changed to another, such as the character and graphic plane 1112 or the subtitle plane 1113 (steps S1018 and S1020). Then, when the newly selected plane is still not
25 satisfactory, the display resolution and the number of colors are changed (step S1019).

As is described above, according to this

embodiment, since the display picture screen for the slide reproduction is generated by using not only the still image plane but also the other memory planes in the video memory 107, the next screen can be
5 generated in advance without waiting for the display picture screens to be switched. Therefore, as soon as the display picture screens are switched, the next screen can be displayed.

In the receiver shown in Fig. 11, the plane
10 used for slide reproduction is selected in accordance with the BS digital broadcasting standards in Japan. However, when the broadcast reception standards differ from the BS digital broadcast standards, a plane to be used need only be selected in accordance
15 with the pertinent standards.

For example, in Fig. 1, in accordance with the output of the demultiplexer 104, the CPU 109 detects the data of the broadcast standards received from the broadcast station.

20 Then, based on the data of the broadcast standards, the CPU 109 changes the setting of a plane to which data are to be written during slide reproduction.

For example, for the BS digital broadcast
25 reception standards in Japan, the digital image data used for slide reproduction are written into the still image plane, the moving image plane and the

character and graphic plane.

For the corresponding standards in Europe, the α blending values for the individual planes are controlled to switch image data of slides so that
5 only the moving image plane and the still image plane are used for slide reproduction.

With this configuration, even a receiver compatible with standards differing from the broadcast reception standards in Japan can
10 appropriately control the memory to reproduce slides.

In the above embodiments, image data stored on a memory card are reproduced using slides. However, the present invention can also be applied for the reproduction of image data stored on another
15 recording medium.

Further, a recording medium, such as a CD-ROM, on which a program is stored that permits a CPU to implement the above functions, is also included within the scope of the present invention, and the
20 same effects can be provided.

Many widely different embodiments of the present invention may be constructed without departing from the spirit and scope of the present invention. It should be understood that the present
25 invention is not limited to the specific embodiments described in the specification, except as defined in the appended claims.

CLAIMS

1. A signal processing apparatus operated by a remote controller comprising:

a designation unit arranged to designate
5 reproduction procedure of an image signal recorded on a recording medium;

a management data processing unit arranged to allocate to an operating key of said remote controller, a reproduction function that corresponds
10 to said designated reproduction procedure, and generate reproduction procedure management information which includes operating key information indicating the operating key to which said reproduction function is allocated, and reproduction
15 procedure information indicating said designated reproduction procedure; and

a recording unit arranged to record on said recording medium the reproduction procedure management information.

20

2. A signal processing apparatus according to claim 1, wherein said management data processing unit selects one of a plurality of layout informations representing predetermined display layouts, and
25 generates said reproduction procedure information using the selected layout information.

3. A signal processing apparatus according to claim 2, wherein said a plurality of layout informations further include template information representing types of operating keys to be employed
5 and functions of said operating keys; and wherein said management data processing unit further generates said operating key information based on the template information included in said selected layout data.

10

4. A signal processing apparatus according to claim 2, wherein said management data processing unit selects said layout data based on the number of pictures of said image signal to be displayed on a
15 same picture that is selected by said designation unit from among the image signals of the plurality of pictures.

5. A signal processing apparatus according to
20 claim 1, wherein said management data processing unit further generates registered image management data for identifying image data designated through said reproduction procedure, and wherein said recording unit writes onto said recording medium said
25 registered image management data.

6. A signal processing apparatus according to

claim 1, further comprising:

a reproduction unit arranged to reproduce said image signal and said reproduction procedure management information stored on said recording medium; and

a control unit arranged to control the reproduction operation of said reproduction unit based on said reproduction procedure management information that is reproduced by said reproduction unit.

7. A signal processing apparatus according to claim 6, further comprising:

a reception unit arranged to receive a television broadcast; and

an output unit arranged to output, to a display device, an image signal associated with said television broadcast received by said reception unit and an image signal reproduced by said reproduction unit.

8. A signal processing apparatus according to claim 7, wherein said reproduction unit includes a memory unit having a plurality of memory planes, and wherein, based on said reproduction procedure designated in accordance with said reproduction procedure management information, said control unit

determines the memory plane to which said image signal is to be written.

9. A signal processing apparatus according to
5 claim 8, wherein said reproduction unit further includes a mixing circuit which mixes image data stored in said plurality of memory planes and outputs the mixed image data to said display device, and wherein, based on said reproduction procedure, said
10 control unit changes the ratio at which said mixing circuit mixes said image data of said memory planes.

10. A signal processing apparatus according to claim 8, further comprising:

15 an output unit arranged to output, to said display device, an image signal reproduced in accordance with said reproduction procedure,
wherein said control unit detects a display resolution and the number of display colors
20 designated by said reproduction procedure, and compares the detected display resolution and number of display colors with the display resolution and the number of display colors of said display device to determine to which memory plane said image signal is
25 to be written.

11. A signal processing apparatus, the

operation of which is controlled by a remote controller, comprising:

5 a designation unit for designating reproduction procedure of an image signal stored on a recording medium;

a management data processing unit arranged to allocate to an operating key of said remote controller a reproduction function corresponding to said designated reproduction procedure, and generate
10 reproduction procedure management information which includes operating key information indicating the operating key to which said reproduction function is allocated, and reproduction procedure information, which indicates said designated reproduction
15 procedure; and

a transmission unit arranged to transmit said reproduction procedure management information to an external device.

20 12. A signal processing apparatus comprising:

a designation unit arranged to designate, in accordance with an instruction from an operating key of an operating unit, reproduction procedure of an image signal recorded on a recording medium;

25 a management data processing unit arranged to allocate to the operating key of said operating unit a reproduction function corresponding to said

designated reproduction procedure, and generate reproduction procedure management information, which include operating key information indicating the operating key to which said reproduction function is allocated, and reproduction procedure information which indicates said designated reproduction procedure; and

a recording unit arranged to record to said recording medium said reproduction procedure management information.

13. A signal processing apparatus comprising:
a designation unit arranged to designate in accordance with an instruction from an operating key of an operating unit, reproduction procedure of an image signal stored on a recording medium;

a management data processing unit arranged to allocate to the operating key of said operating unit a reproduction function corresponding to said designated reproduction procedure, and generate reproduction procedure management information, which includes operating key information indicating the operating key to which said reproduction function is allocated, and reproduction procedure information, which indicates said designated reproduction procedure; and

a transmission unit arranged to transmit said

reproduction procedure management information to an external device.

14. A television broadcast receiver, the
5 operation of which is controlled by a remote controller, comprising:

a designation unit arranged to designate reproduction procedure of an image signal stored on a recording medium;

10 a management data processing unit arranged to allocate to the operating key of said remote controller a reproduction function corresponding to said designated reproduction procedure, and generate reproduction procedure management information, which
15 includes operating key information indicating the operating key to which said reproduction function is allocated, and reproduction procedure information which indicates said designated reproduction procedure;

20 a recording unit arranged to write onto said recording medium said reproduction procedure management information;

a reproduction unit arranged to reproduce the image signal and said reproduction procedure
25 management information stored on said recording medium;

a reception unit arranged to receive a

television broadcast signal that includes moving image data and still image data;

a display image generation unit which includes a memory unit that has a moving image memory plane
5 for moving image data and a still image memory plane for still image data, arranged to generate an image signal for display using said memory unit and output said image signal to a display device;

a mode switching unit arranged to switch
10 between a first mode for displaying, on said display device, images associated with a television broadcast received by said reception unit, and a second mode for displaying, on said display device, an image associated with the image signal that is reproduced
15 from said recording medium by said reproduction unit in accordance with said reproduction procedure management information; and

a writing control unit arranged to write, in said first mode, said moving image data included in
20 said television broadcast signal onto said moving image memory plane and also write said still image data onto said still image memory plane, and write, in said second mode, the reproduced image signals of a plurality of pictures to both said moving image
25 memory plane and said still image memory plane.

15. A television broadcast signal receiving

apparatus comprising:

a reproduction unit arranged to reproduce, from
a recording medium, a still image signal and
reproduction procedure management information
5 indicating reproduction procedure of said still image
signal;

a reception unit arranged to receive a
television broadcast signal that includes moving
image data and still image data;

10 a display image generation unit, which includes
a memory unit that has a moving image memory plane
for moving image data and a still image memory plane
for still image data, arranged to generate an image
signal for display using said memory unit and output
15 said image signal to a display device;

a mode switching unit arranged to switch
between a first mode for displaying, on said display
device, an image associated with a television
broadcast received by said reception unit, and a
20 second mode for displaying, on said display device,
an image associated with the image signal that is
reproduced from said recording medium by said
reproduction unit in accordance with said
reproduction procedure management information; and

25 a writing control unit arranged to write, in
said first mode, said moving image data included in
the television broadcast signal onto said moving

image memory plane and also write said still image data onto said still image memory plane, and write, in said second mode, the reproduced still image signal of a plurality of pictures to both said moving
5 image memory plane and said still image memory plane.

16. A signal processing method performed by a remote controller comprising the steps of:

designating reproduction procedure of an image
10 signal recorded on a recording medium;

allocating to an operating key of said remote controller, a reproduction function that corresponds to said designated reproduction procedure, and generating reproduction procedure management
15 information which includes operating key information indicating the operating key to which said reproduction function is allocated, and reproduction procedure information indicating said designated reproduction procedure; and

20 the recording on said recording medium the reproduction procedure management information.

17. A signal processing method performed by a remote controller comprising the steps of:

25 designating reproduction procedure of an image signal stored on a recording medium;

allocating to an operating key of said remote

controller a reproduction function corresponding to
said designated reproduction procedure, and
generating reproduction procedure management
information which includes operating key information
5 indicating the operating key to which said
reproduction function is allocated, and reproduction
procedure information which indicates said designated
reproduction procedure; and
transmitting said reproduction procedure
10 management information to an external device.

18. A signal processing method comprising the
steps of:

designating, in accordance with an instruction
15 from an operating key of an operating unit,
reproduction procedure of an image signal recorded on
a recording medium;

allocating to the operating key of said
operating unit a reproduction function corresponding
20 to said designated reproduction procedure, and
generating reproduction procedure management
information which includes operating key information
indicating the operating key to which said
reproduction function is allocated, and reproduction
25 procedure information which indicates said designated
reproduction procedure; and

recording to said recording medium said

reproduction procedure management information.

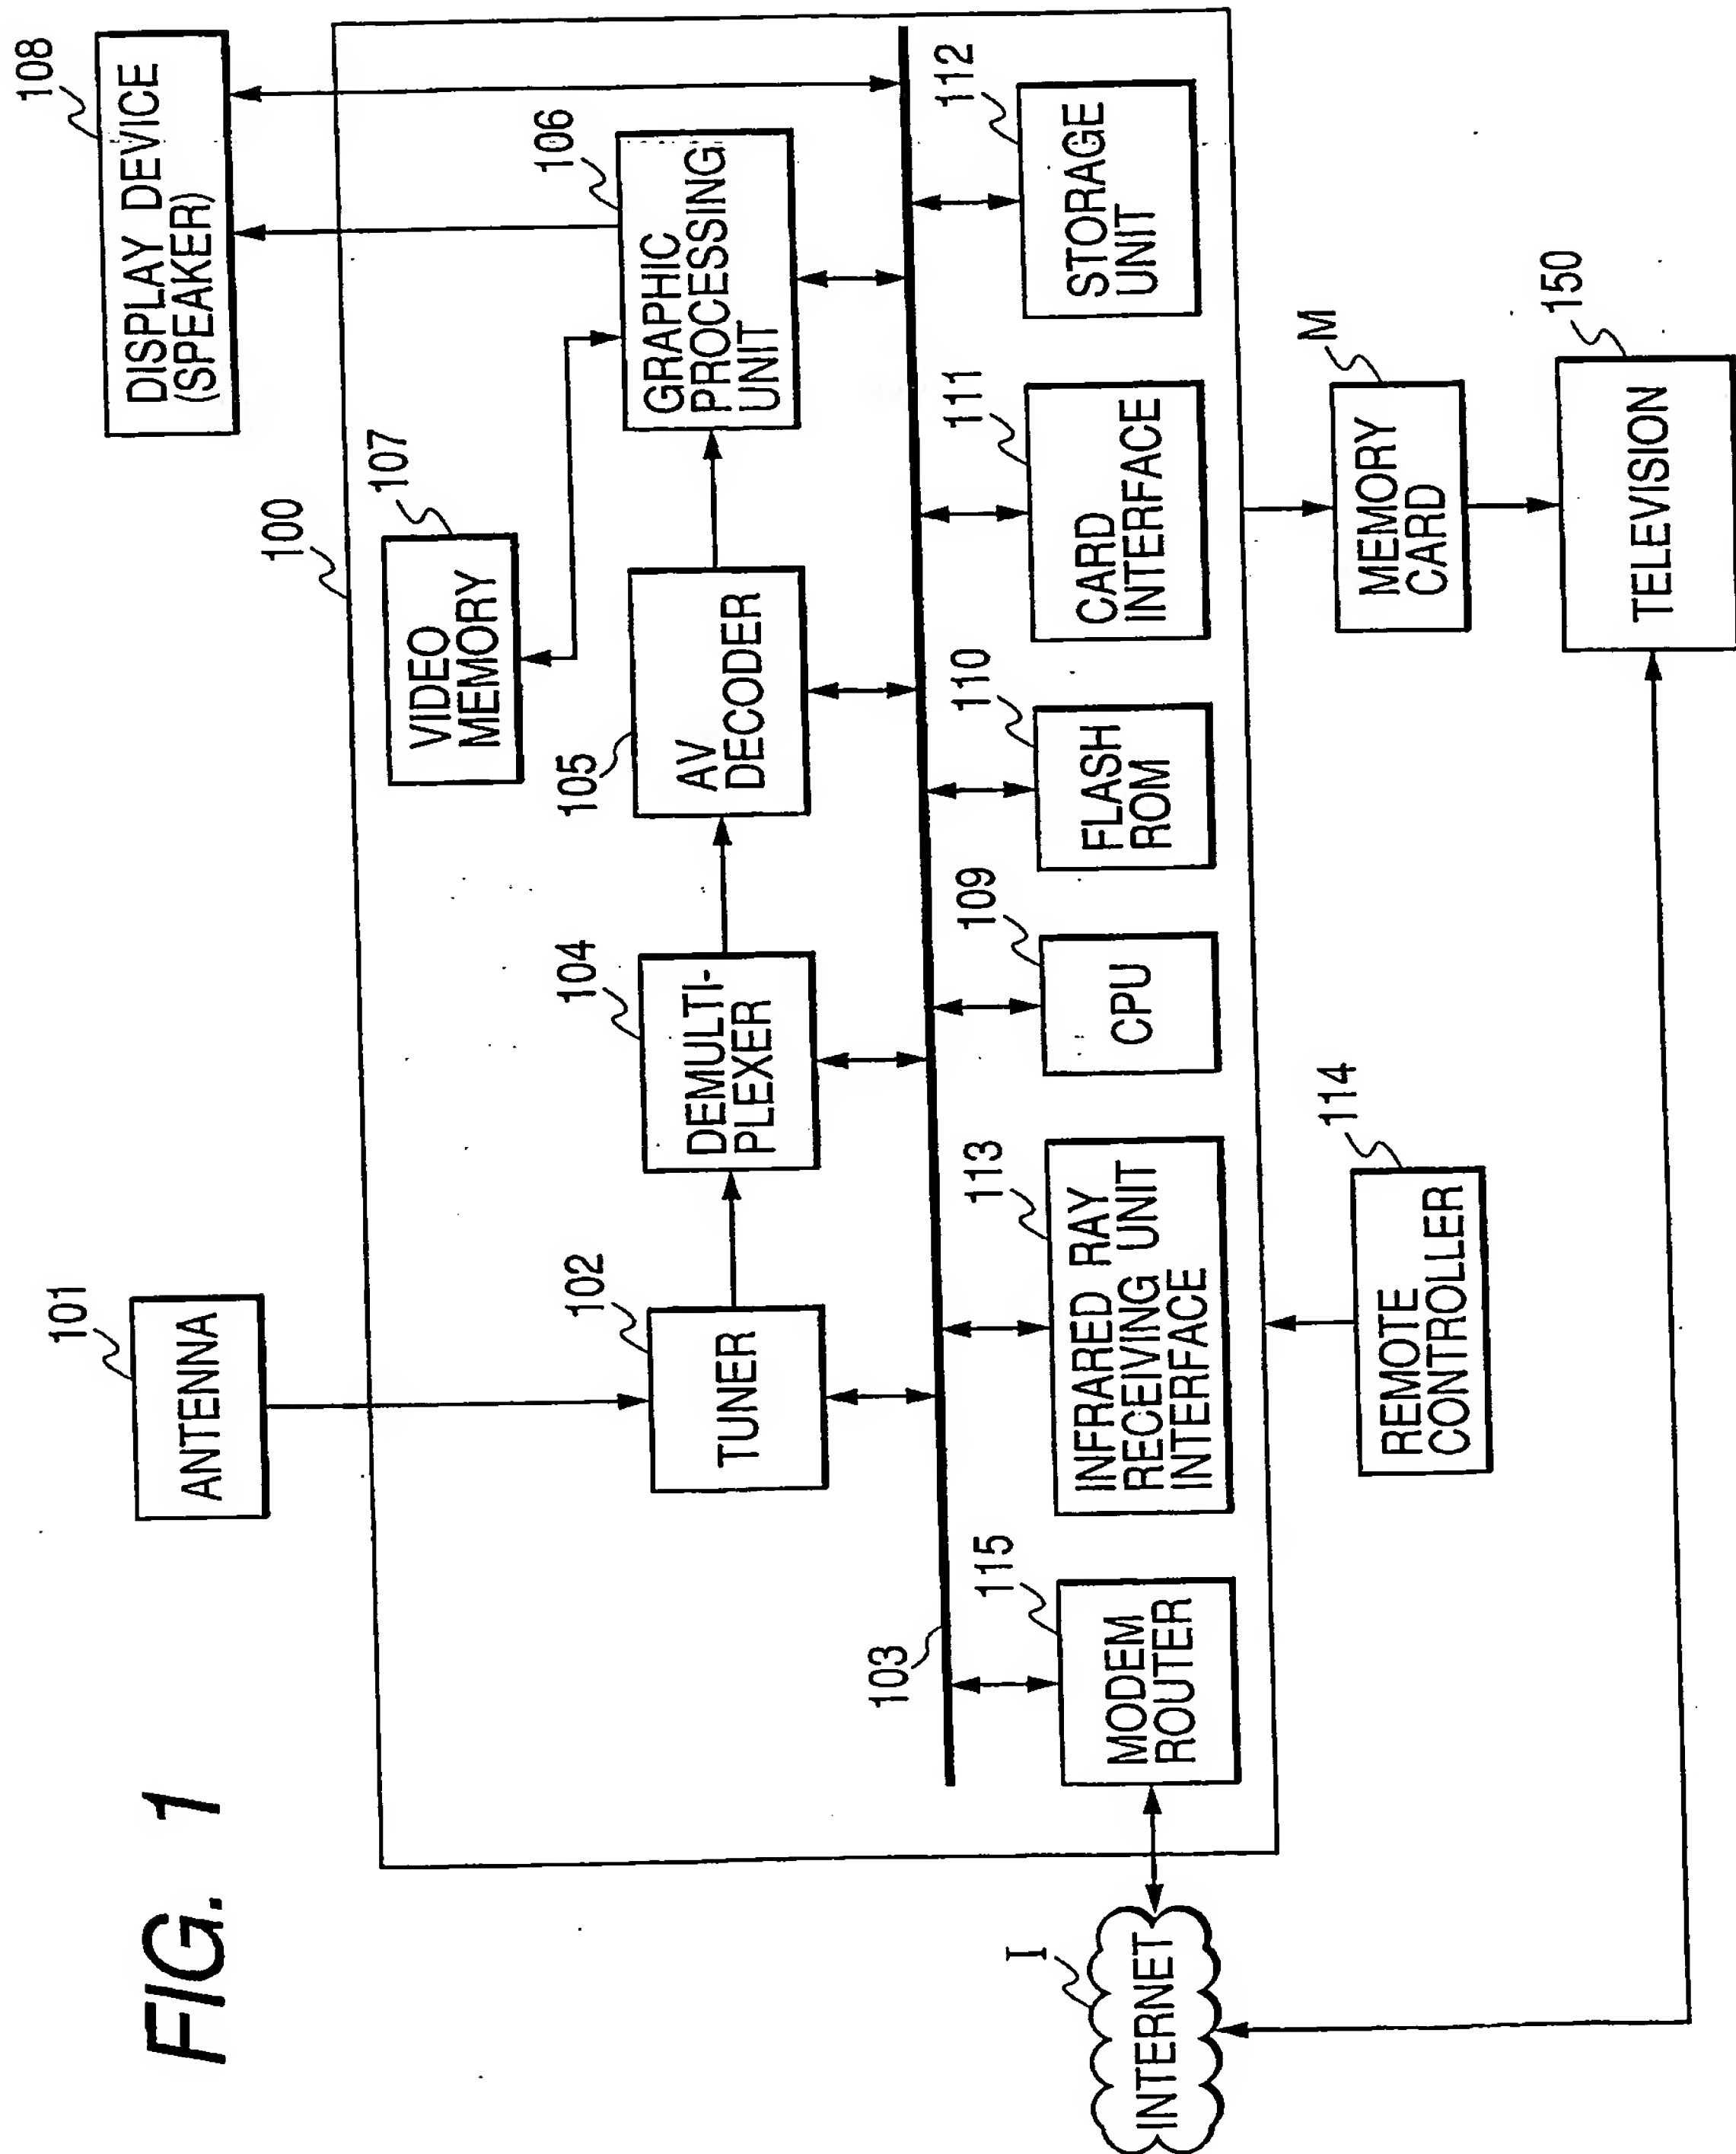
19. A signal processing method comprising the steps of:

5 designating, in accordance with an instruction from an operating key of an operating unit, reproduction procedure of an image signal stored on a recording medium;

 allocating to the operating key of said
10 operating unit a reproduction function corresponding to said designated reproduction procedure, and generating reproduction procedure management information which includes operating key information indicating the operating key to which said
15 reproduction function is allocated, and reproduction procedure information, which indicates said designated reproduction procedure; and

 transmitting said reproduction procedure management information to an external device.

20



2 / 13

FIG. 2

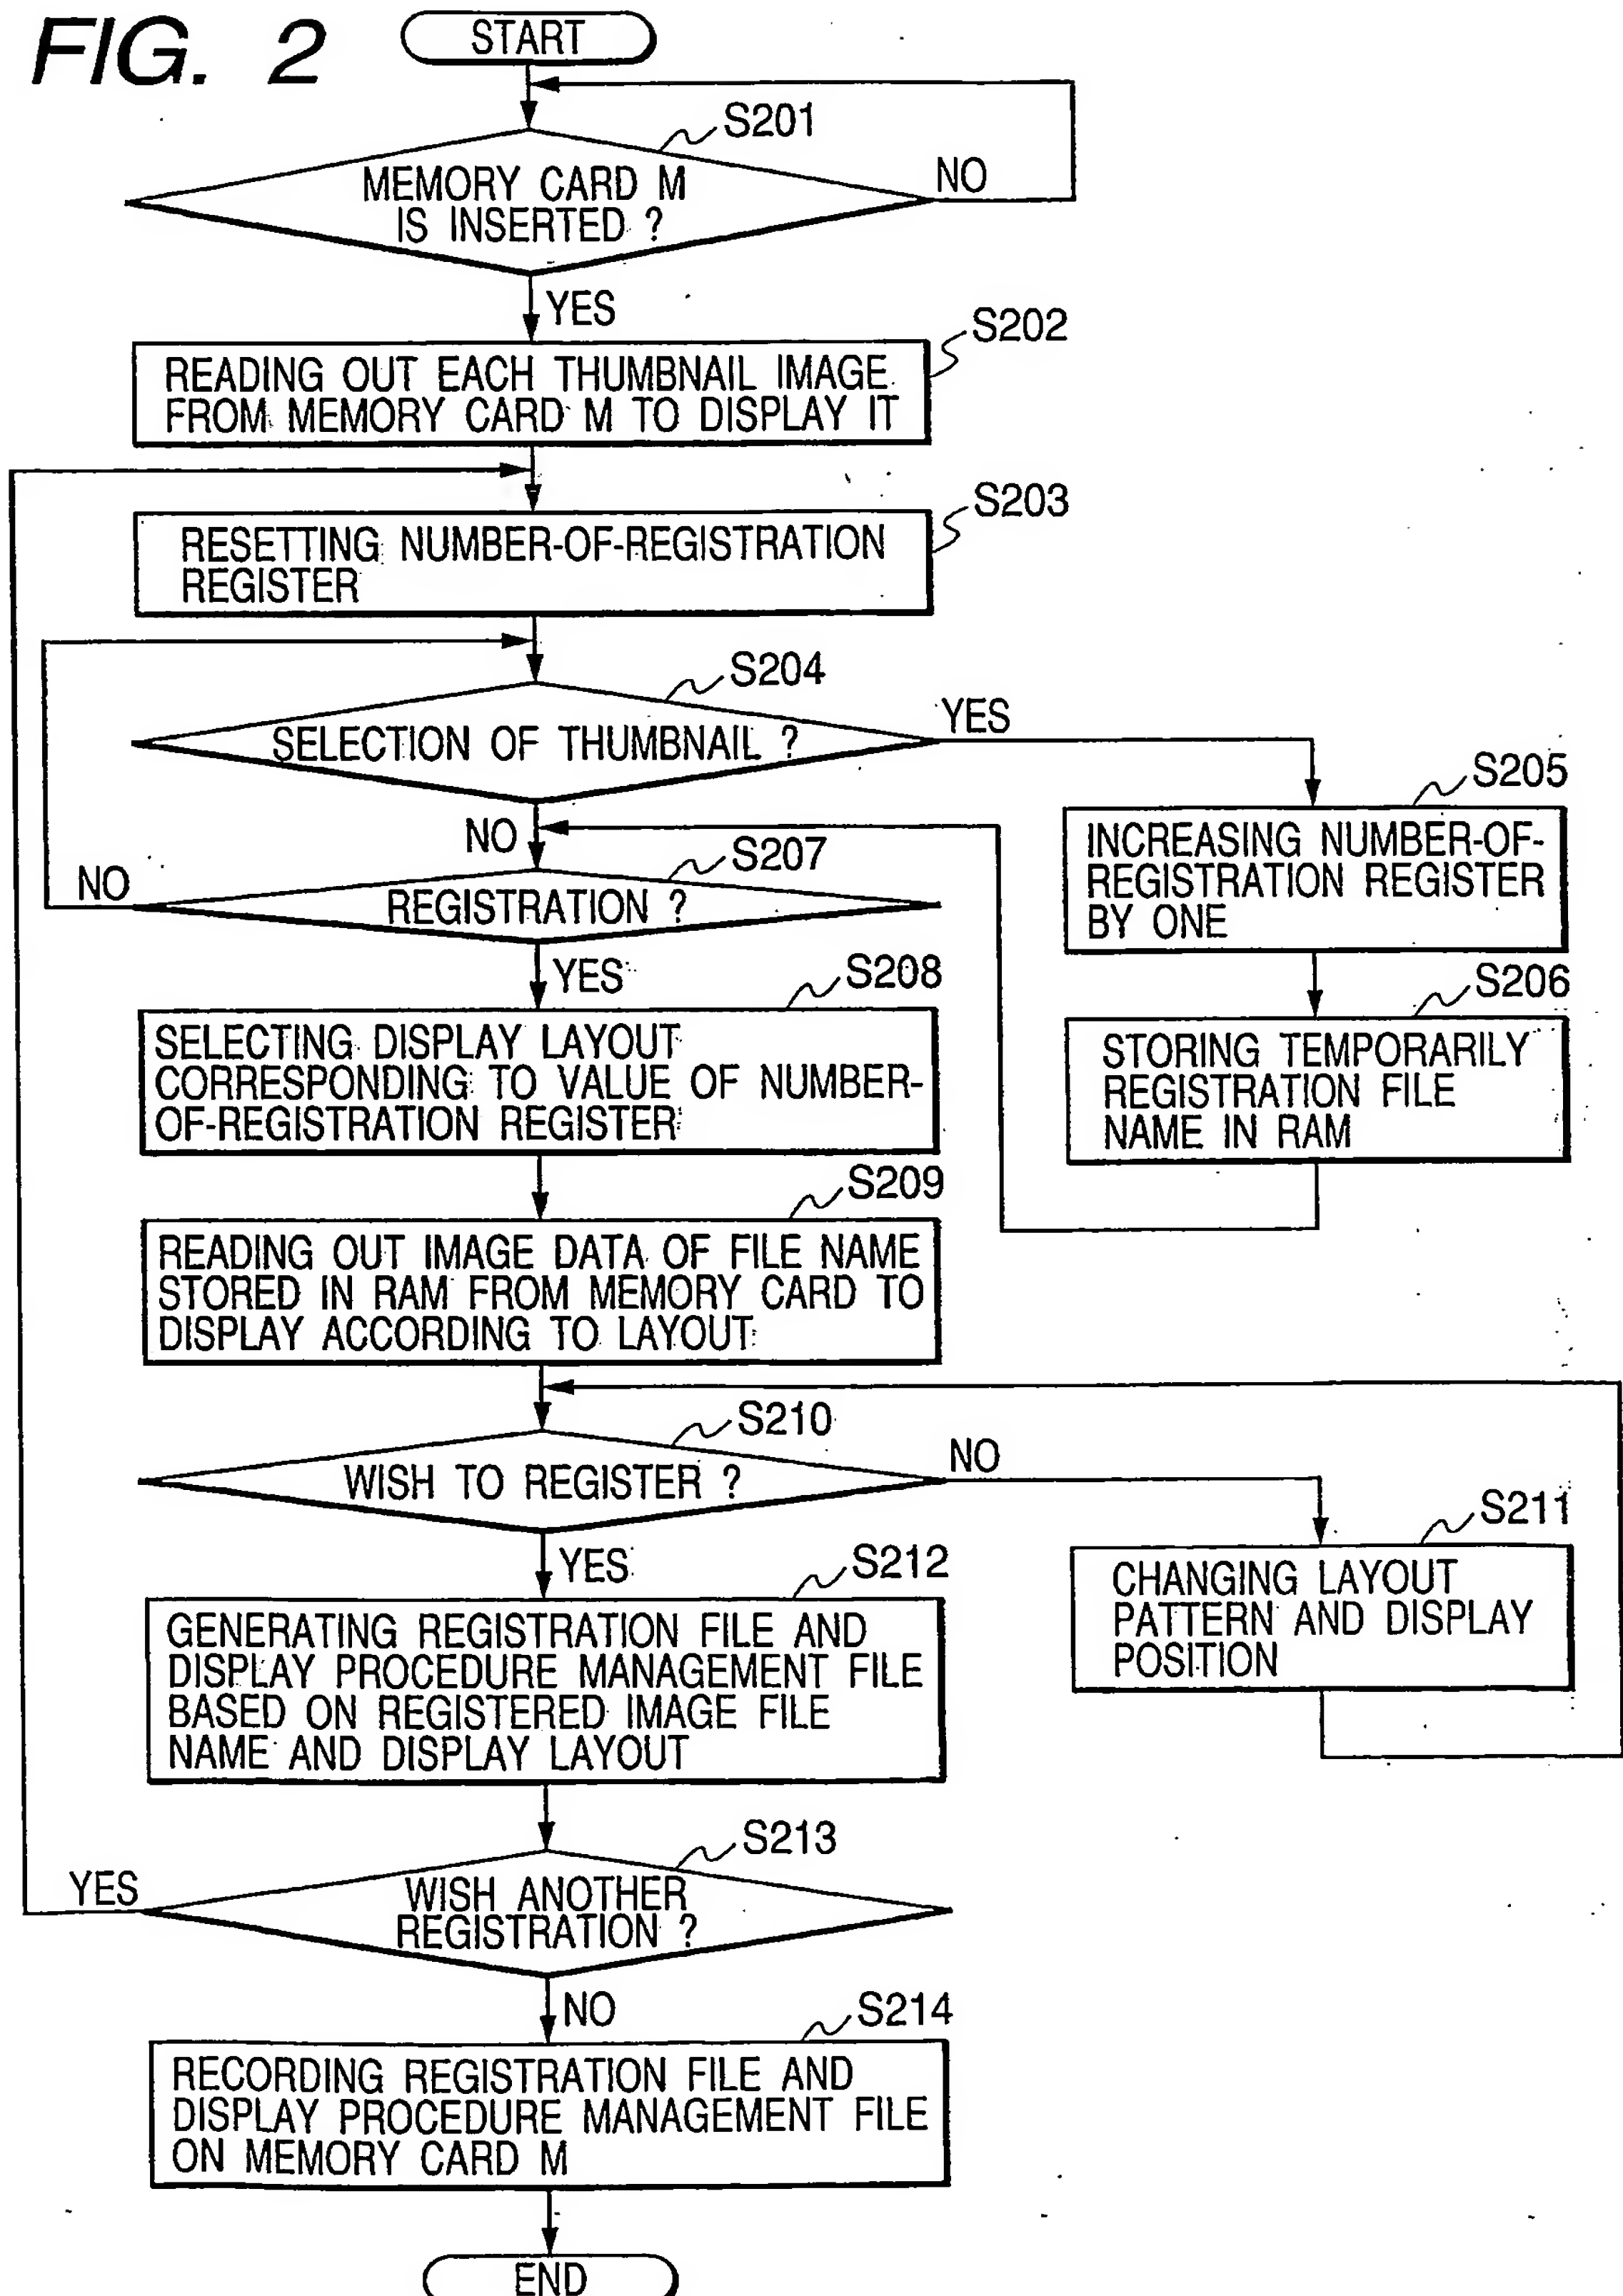


FIG. 3

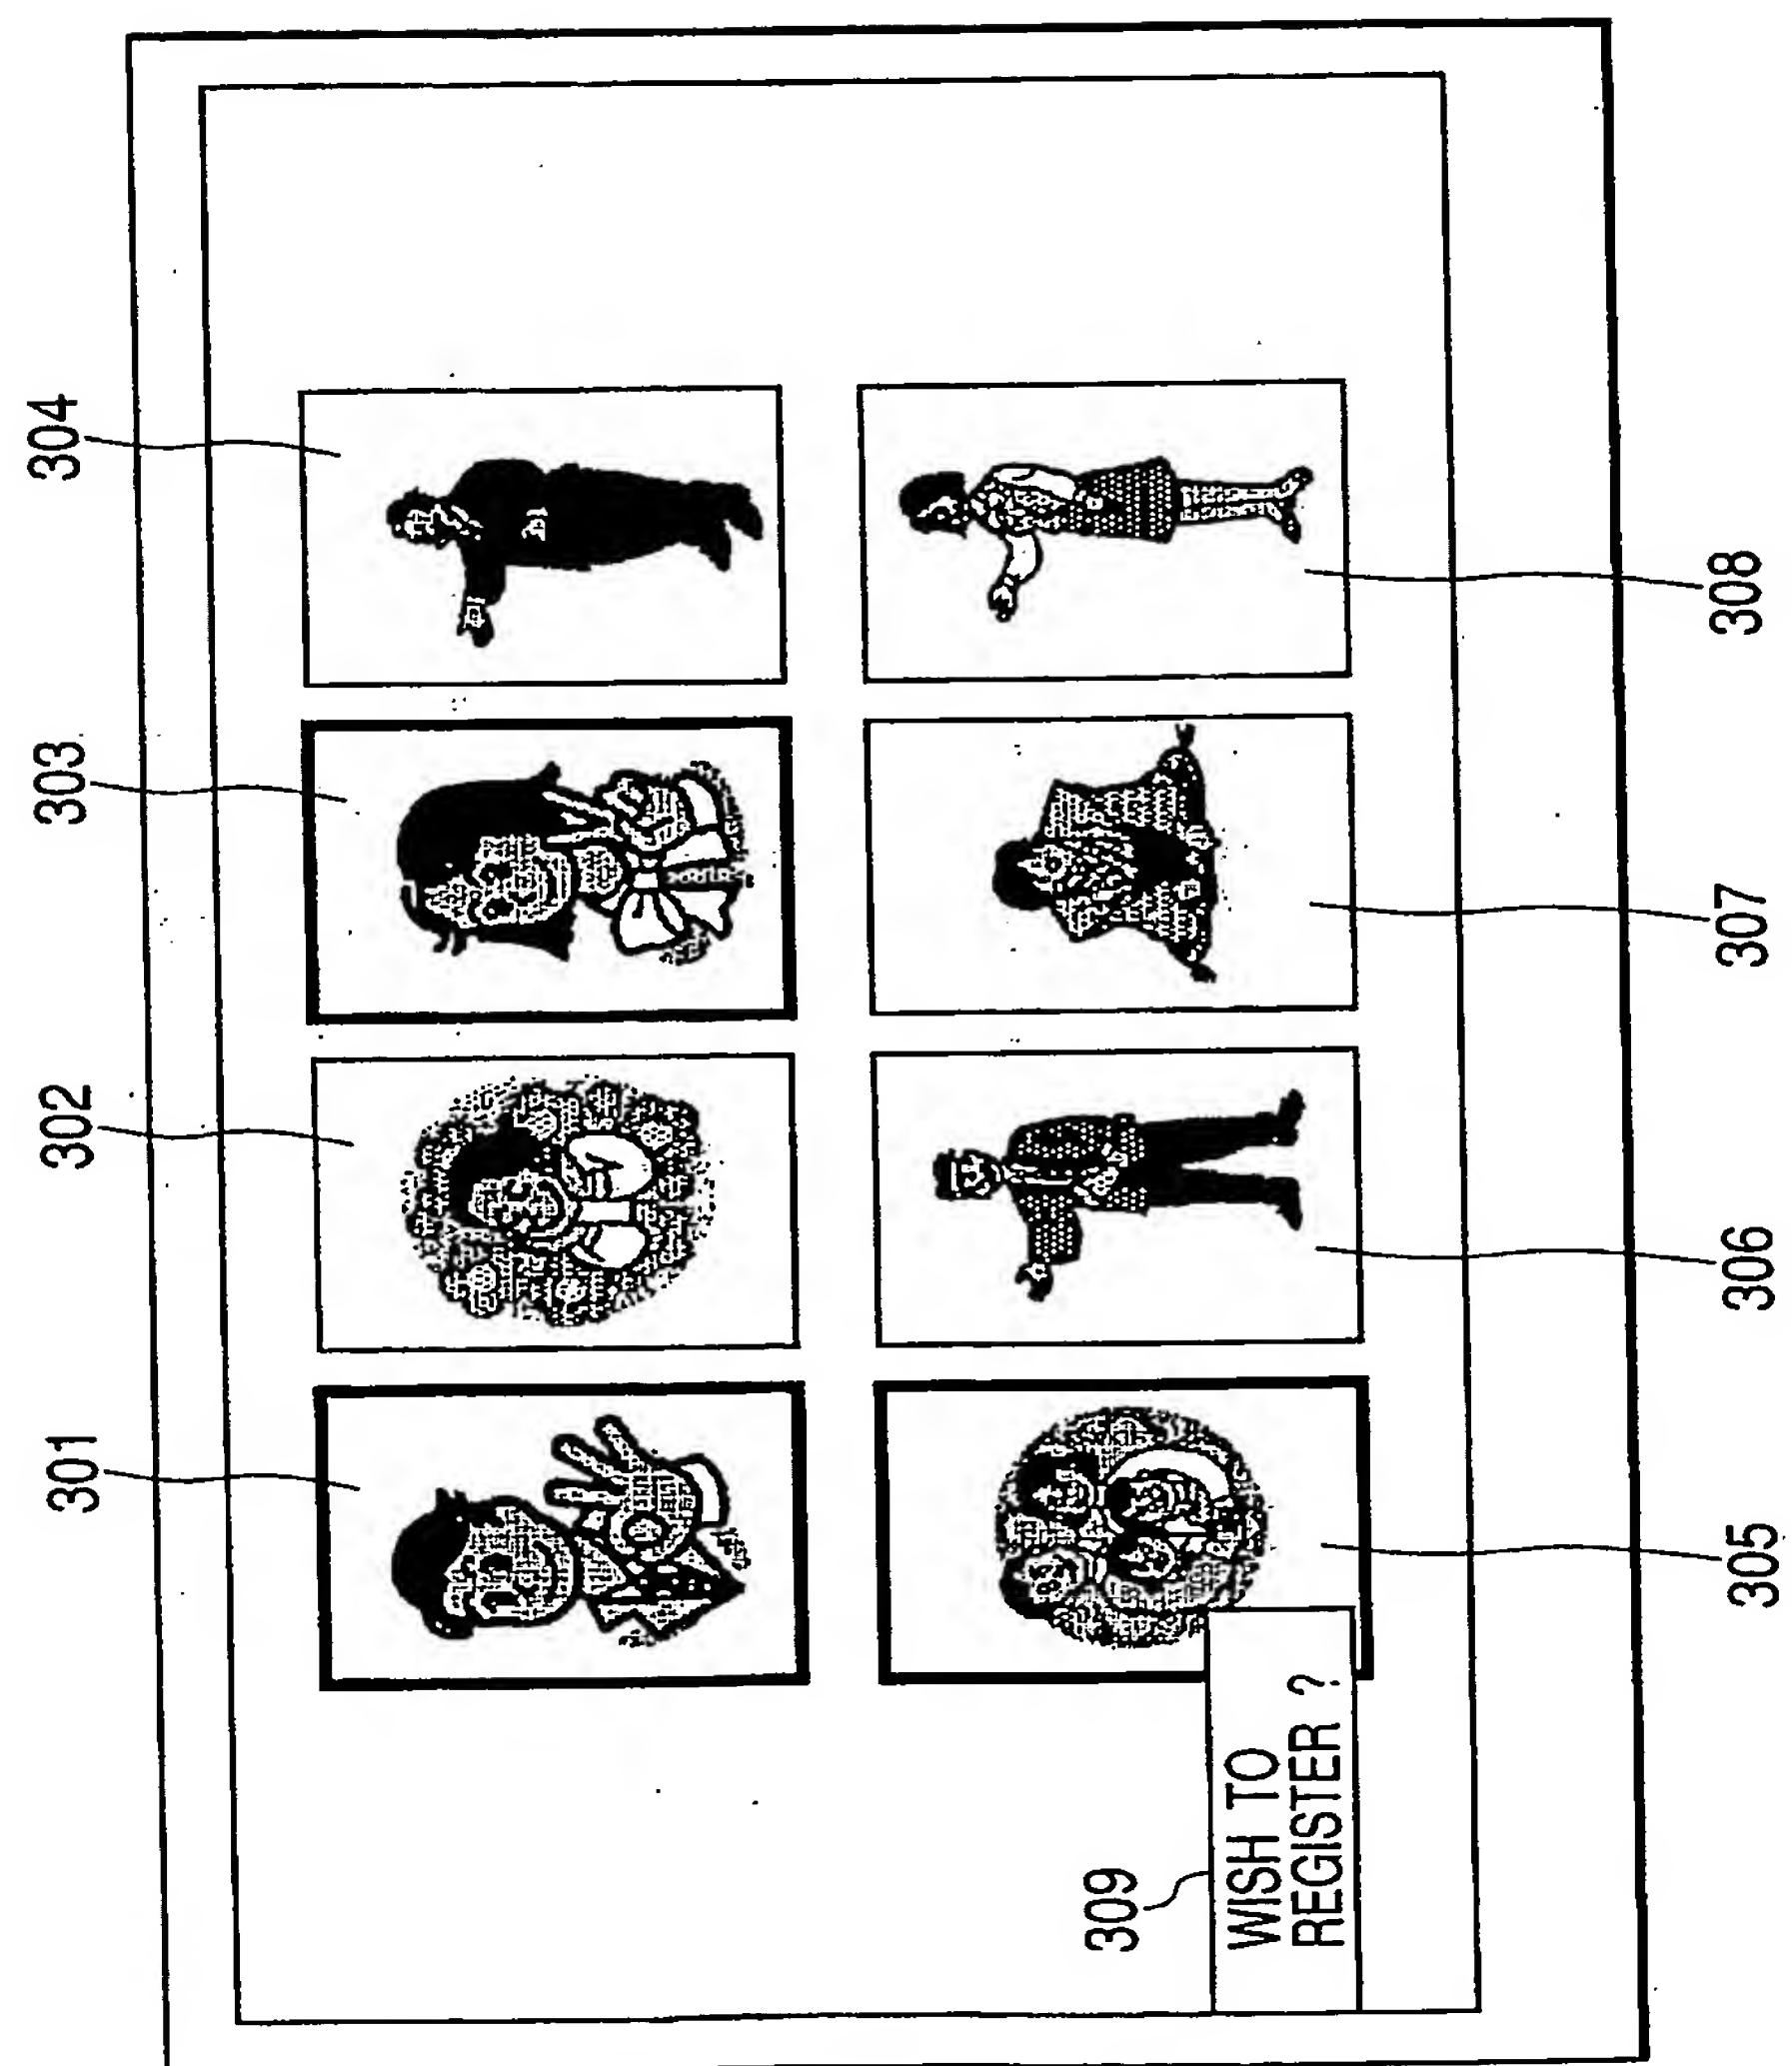


FIG. 4

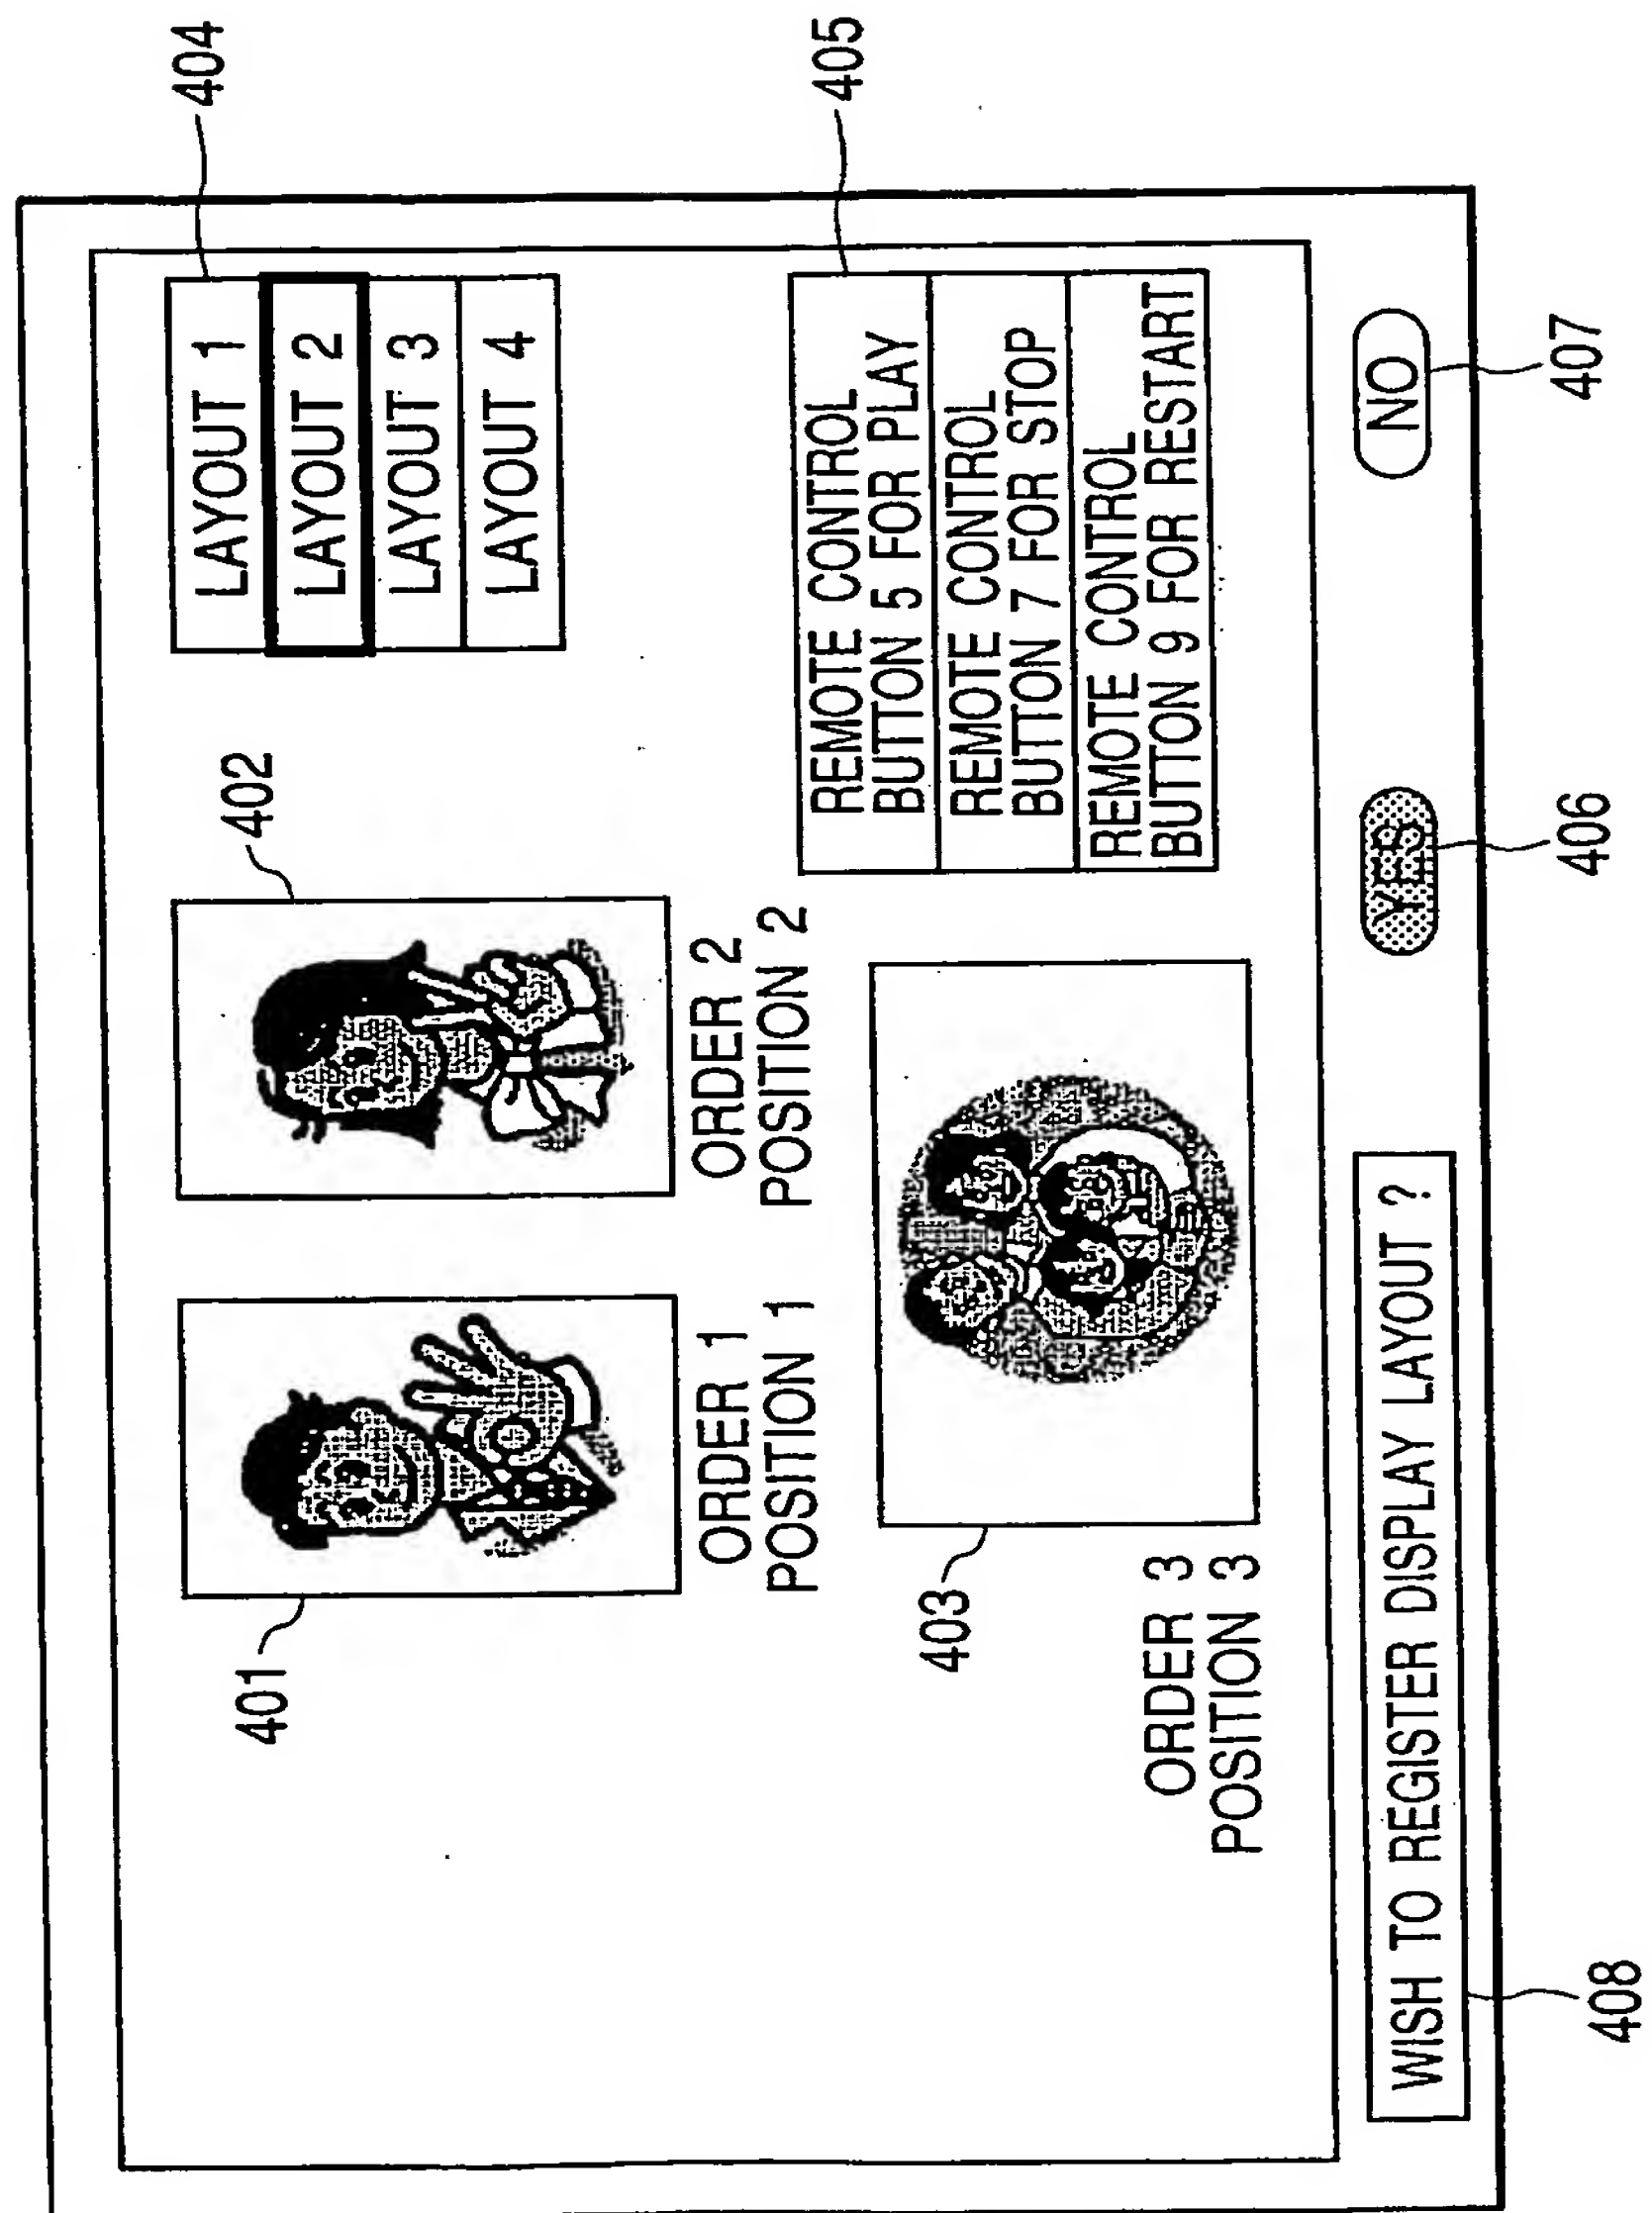



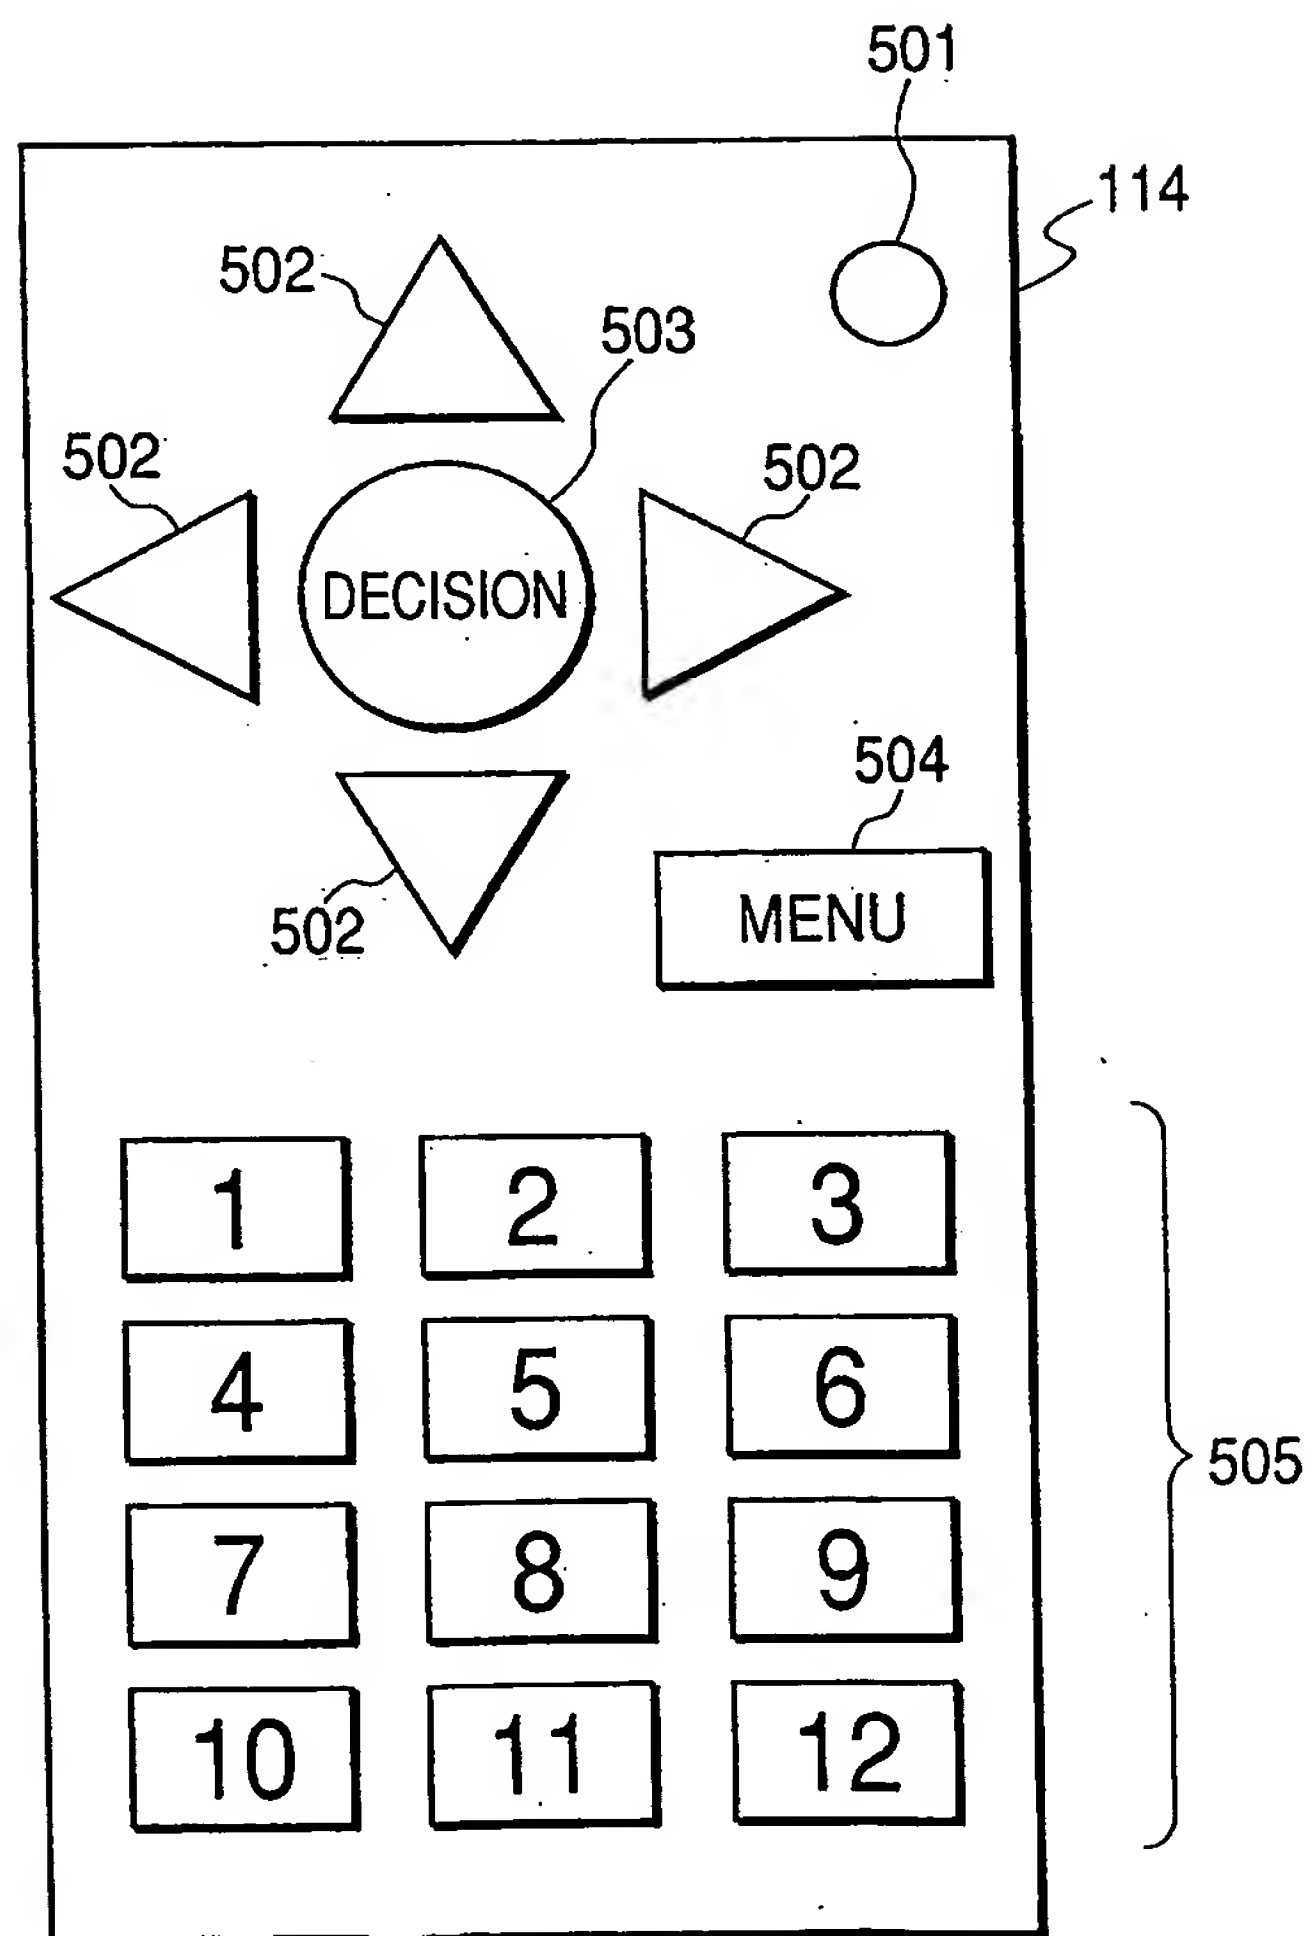
FIG. 5

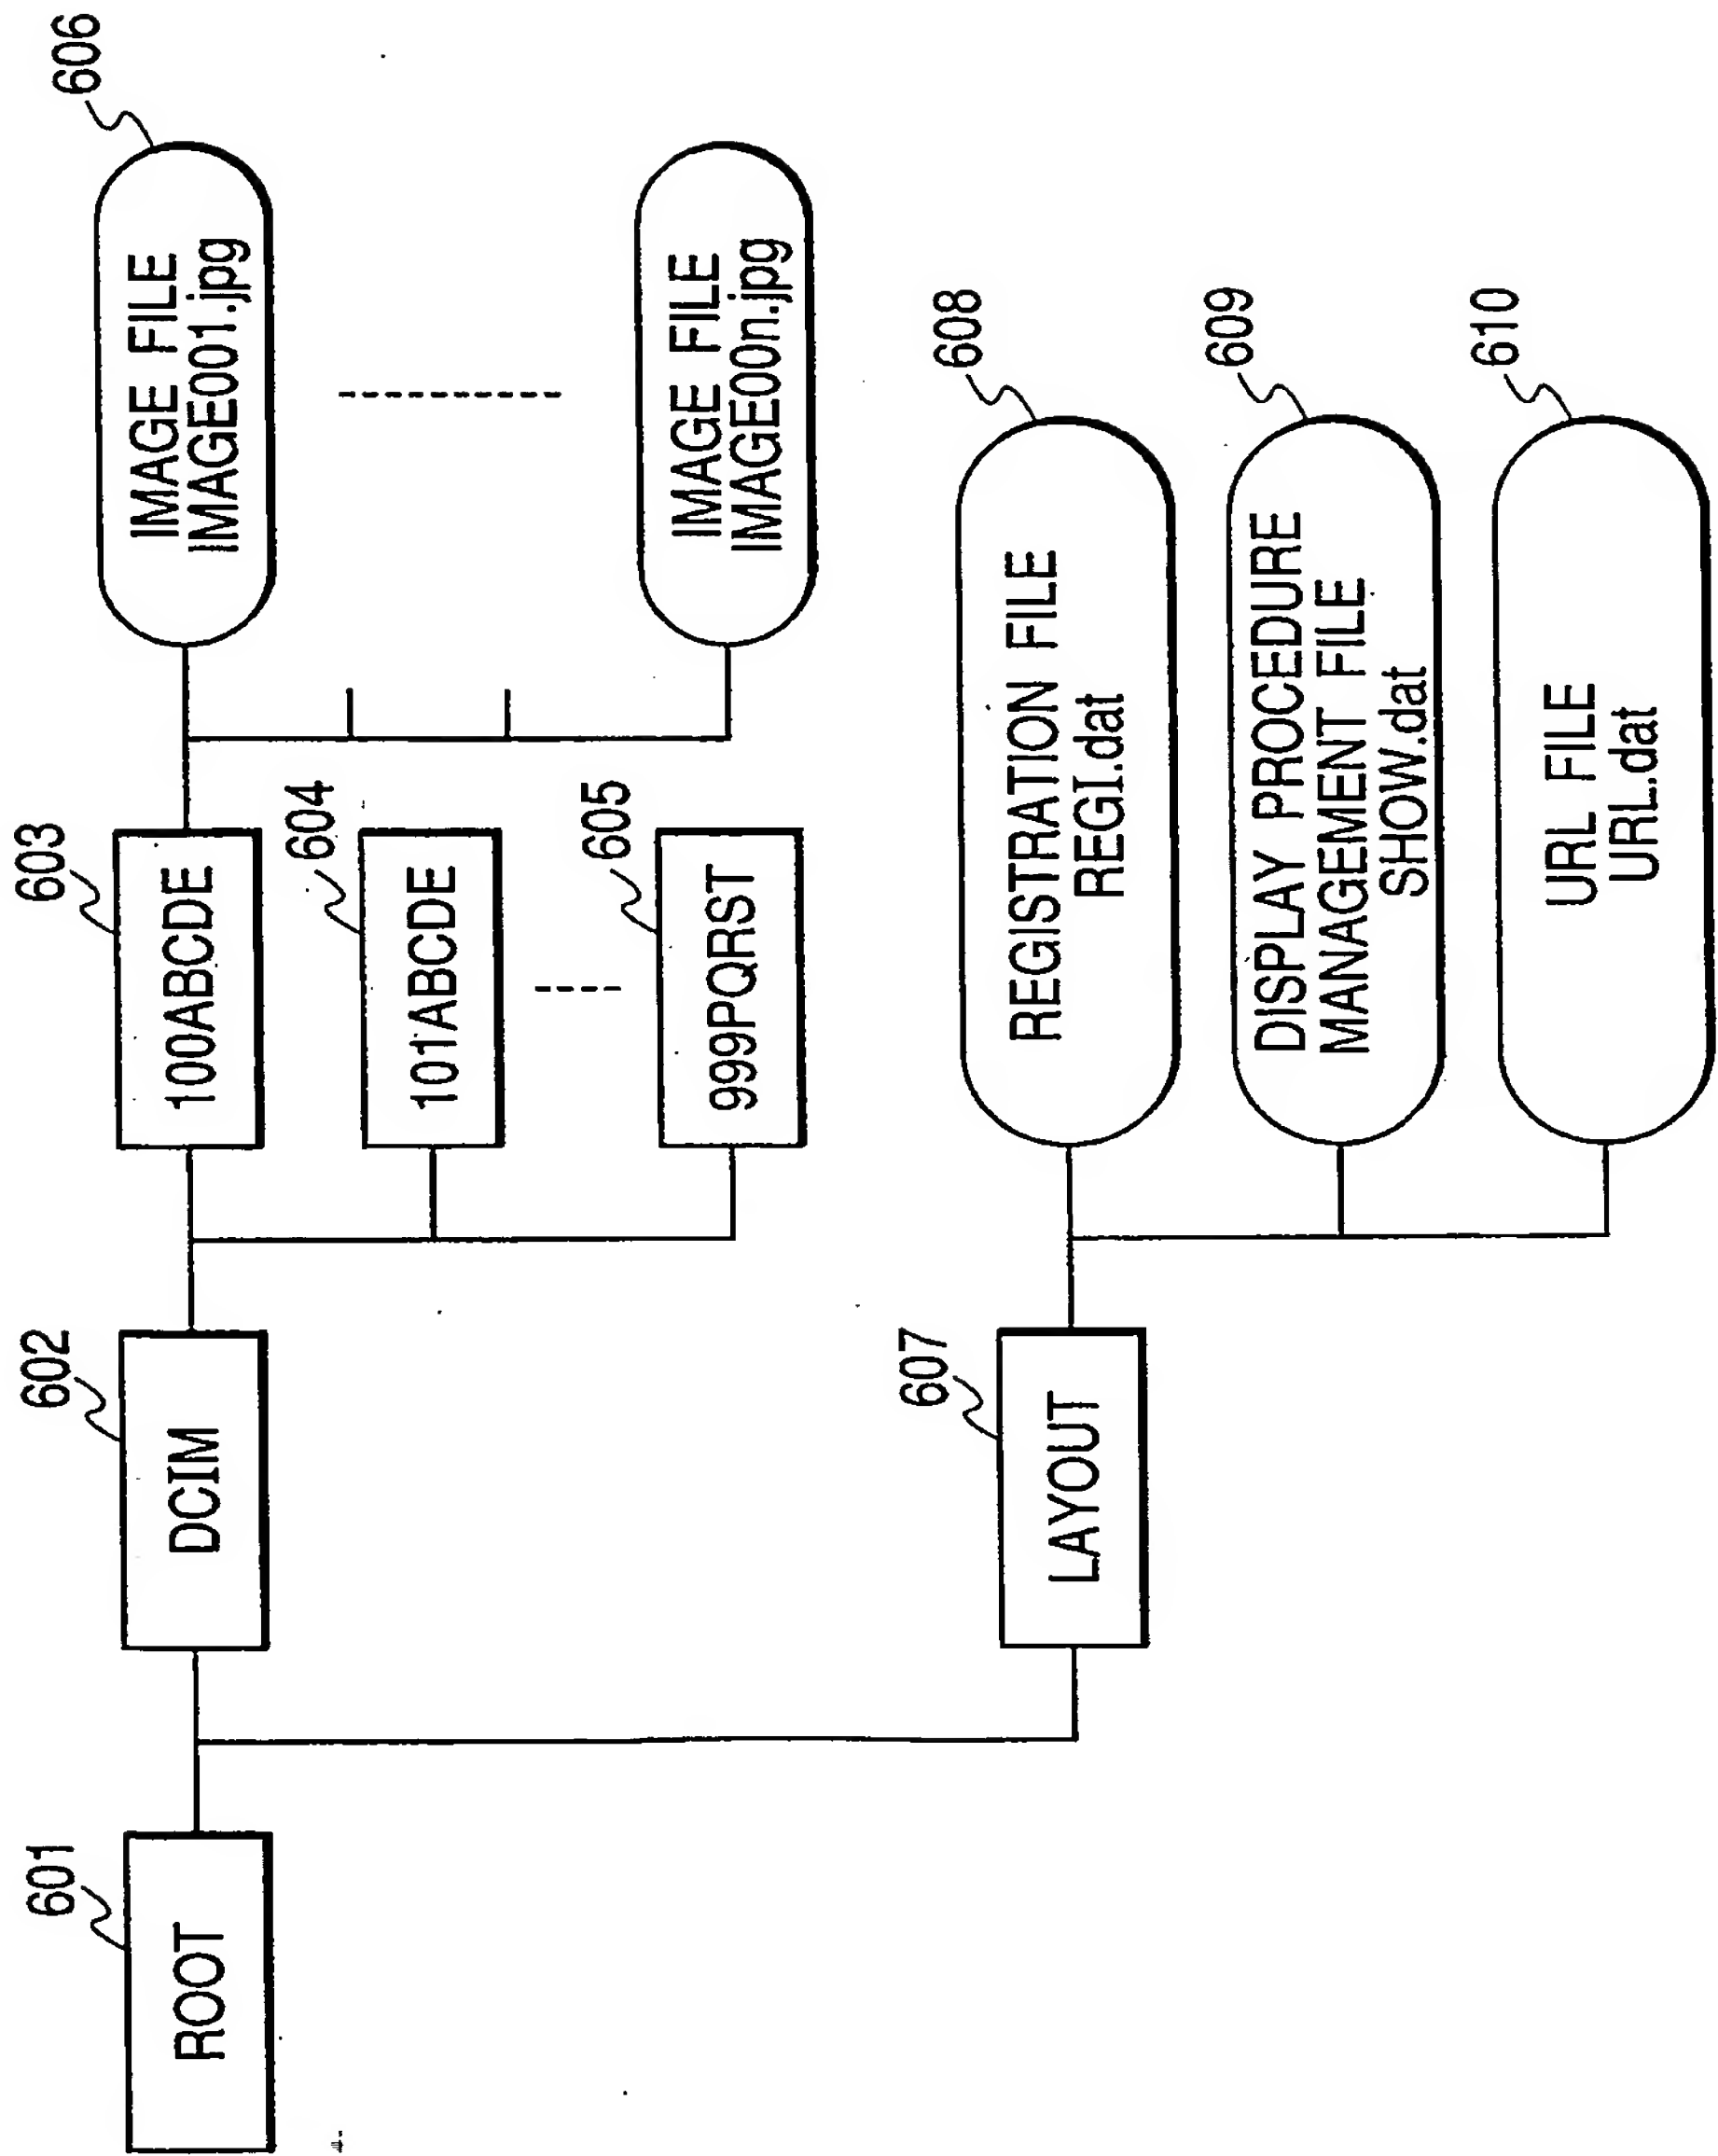FIG. 6



7 / 13

FIG. 7

REGISTRATION FILE

```
[ HDR ]
REGISTRATION FILE ID
FILE LENGTH
NUMBER OF SECTIONS
NUMBER OF PARAMETERS
[ BASE ]
  • REGISTERED FILE NAME
  • REGISTERED FILE DIRECTORY
  • LAYOUT No.
  • SLIDE GROUP ID
  • SLIDE POSITION No.
  • DISPLAY ORDER No.
  :
  • OPTION SETTING
OPTION
  • DISPLAY POSITION X
  • DISPLAY POSITION Y
  • DISPLAY SIZE SX
  • DISPLAY SIZE SY
  • NUMBER OF DISPLAY COLORS CO

[ BASE ]
  :

[ BASE ]
  :

[ BASE ]
  :
```

FIG. 8

DISPLAY PROCEDURE MANAGEMENT FILE

[HDR]
DISPLAY PROCEDURE MANAGEMENT FILE ID
FILE LENGTH
NUMBER OF SECTIONS
NUMBER OF PARAMETERS
[SLIDE]
• SLIDE GROUP ID
• NUMBER OF REGISTERED FILES
• LAYOUT No.
• REMOTE CONTROL CODE 1
• REMOTE CONTROL CODE 2
•
• REMOTE CONTROL CODE n

[SLIDE]
• SLIDE GROUP ID
• NUMBER OF REGISTERED FILES
• LAYOUT No.
• REMOTE CONTROL CODE 1
• REMOTE CONTROL CODE 2
•
• REMOTE CONTROL CODE n

[SLIDE]
• SLIDE GROUP ID
• NUMBER OF REGISTERED FILES
• LAYOUT No.
• REMOTE CONTROL CODE 1
• REMOTE CONTROL CODE 2
•
• REMOTE CONTROL CODE n

FIG. 9

FIG. 9A

FIG. 9B

FIG. 9A

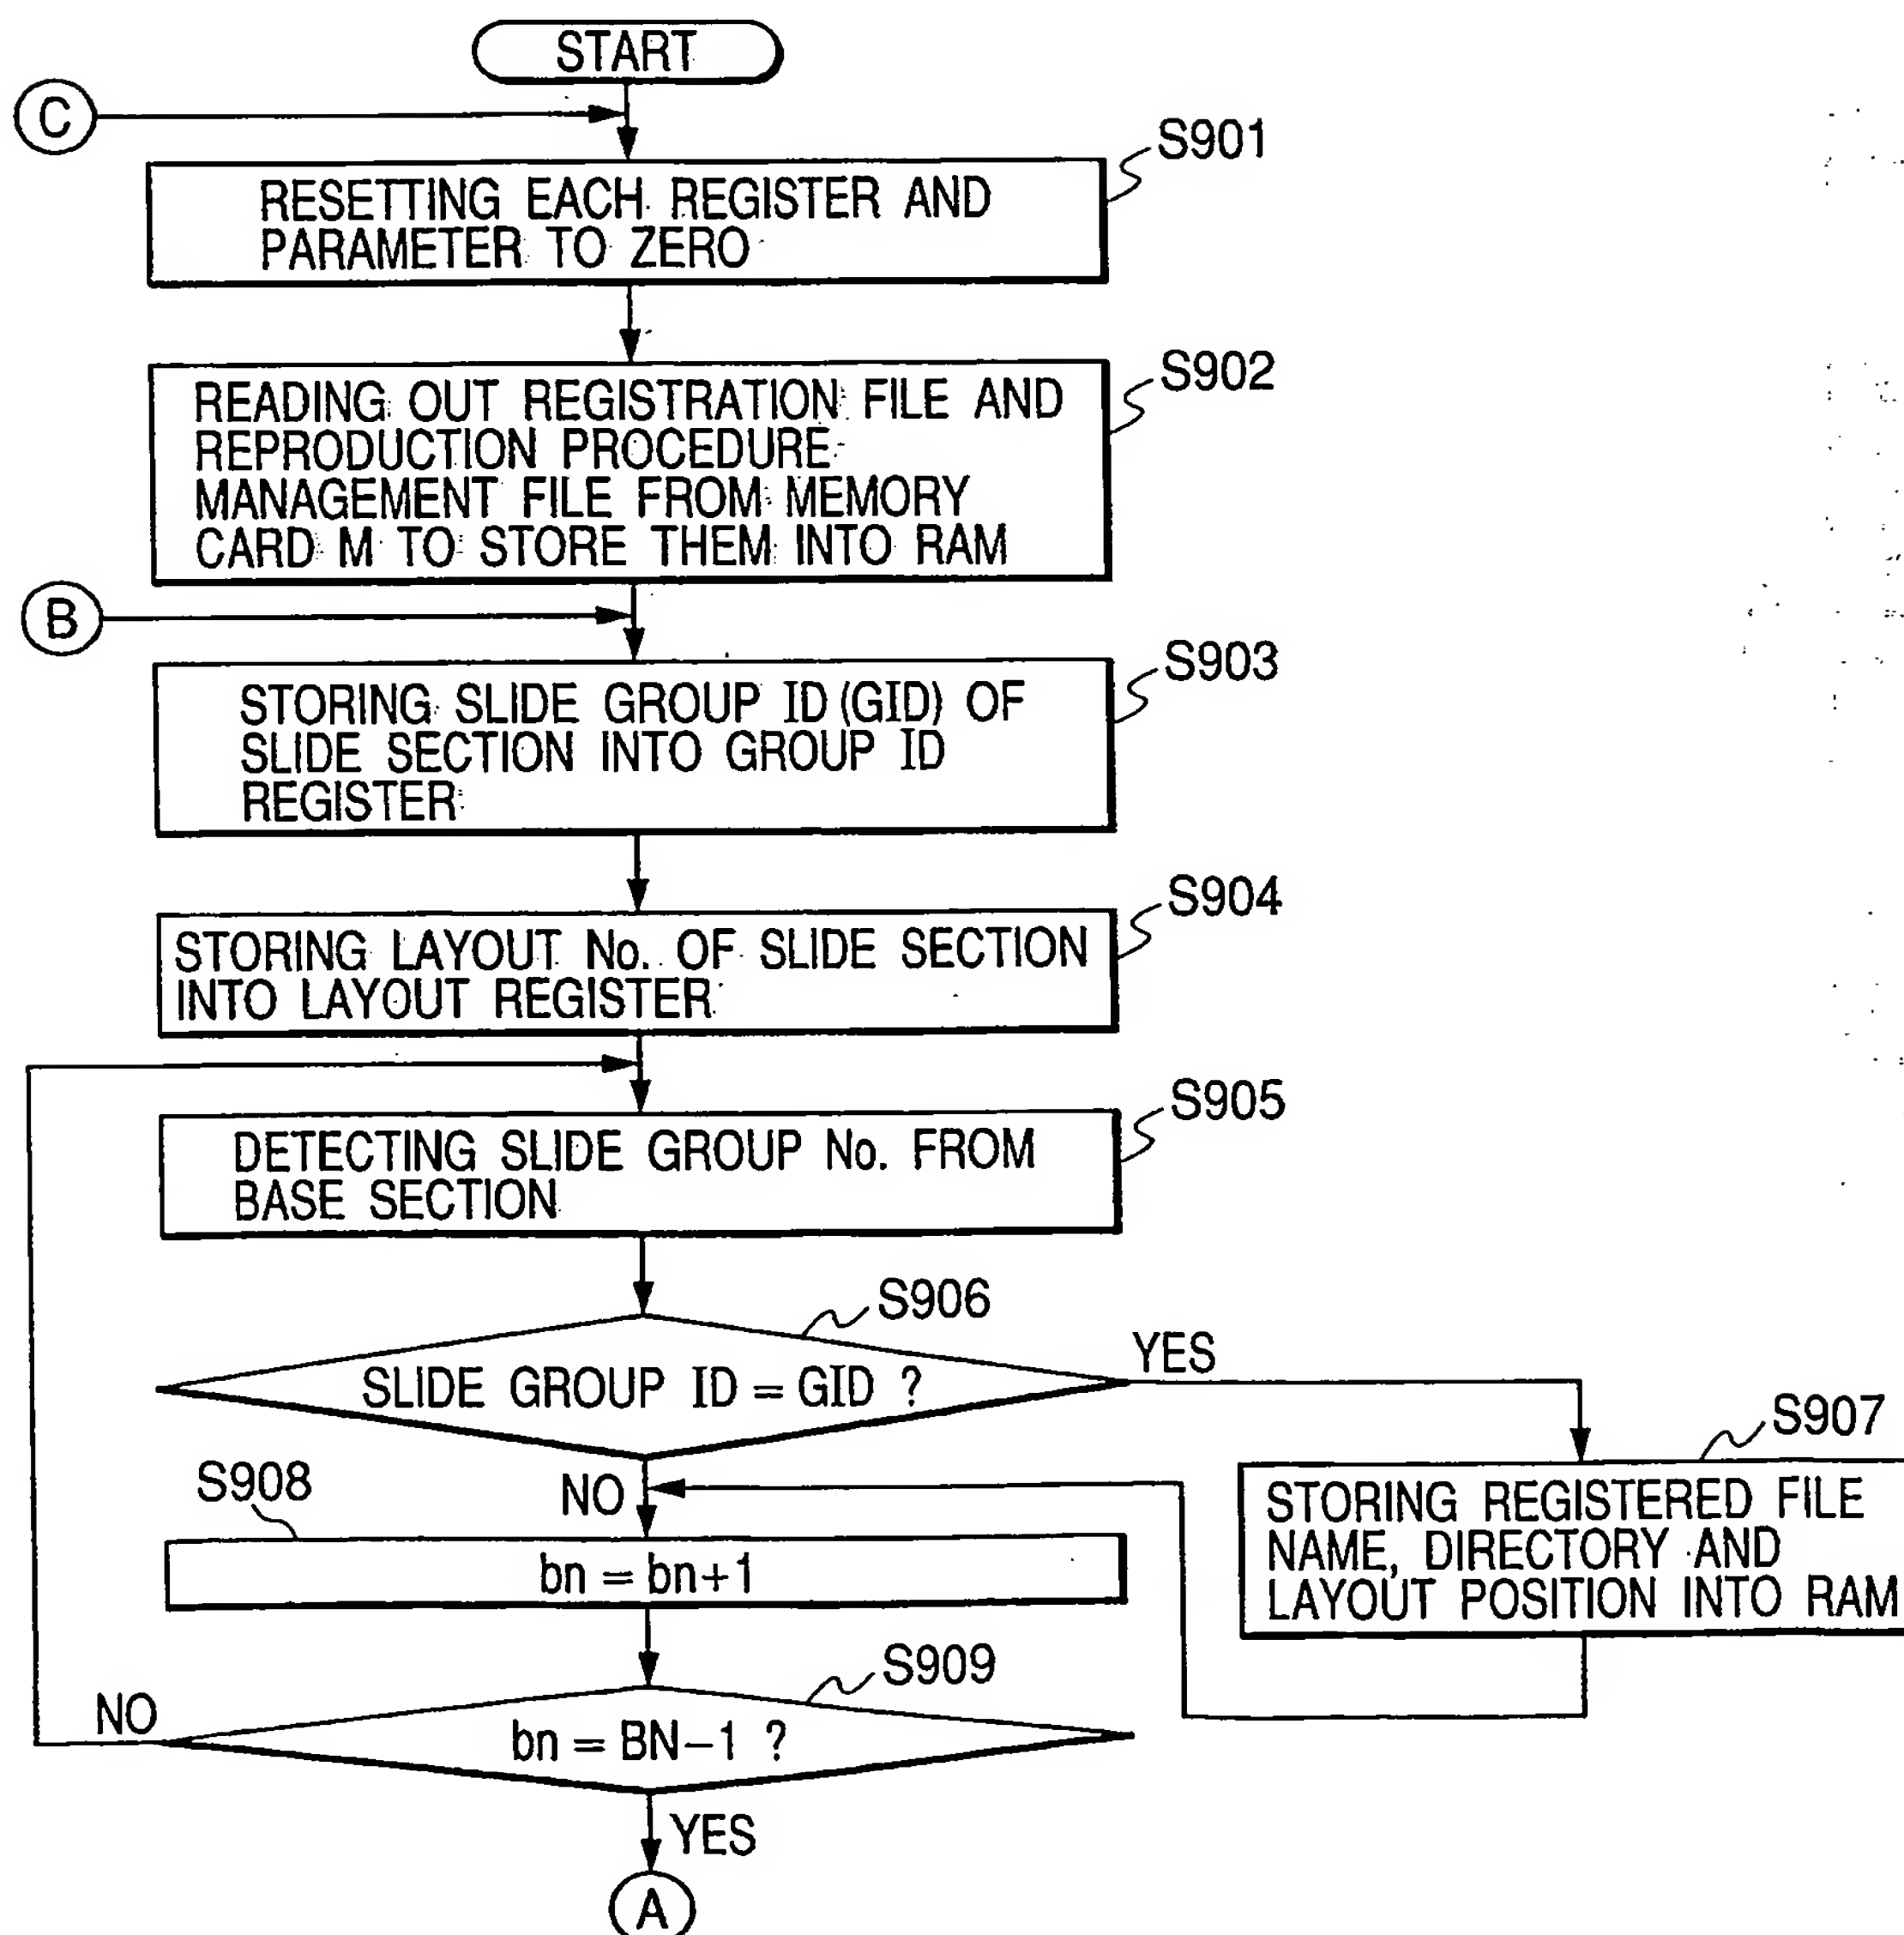


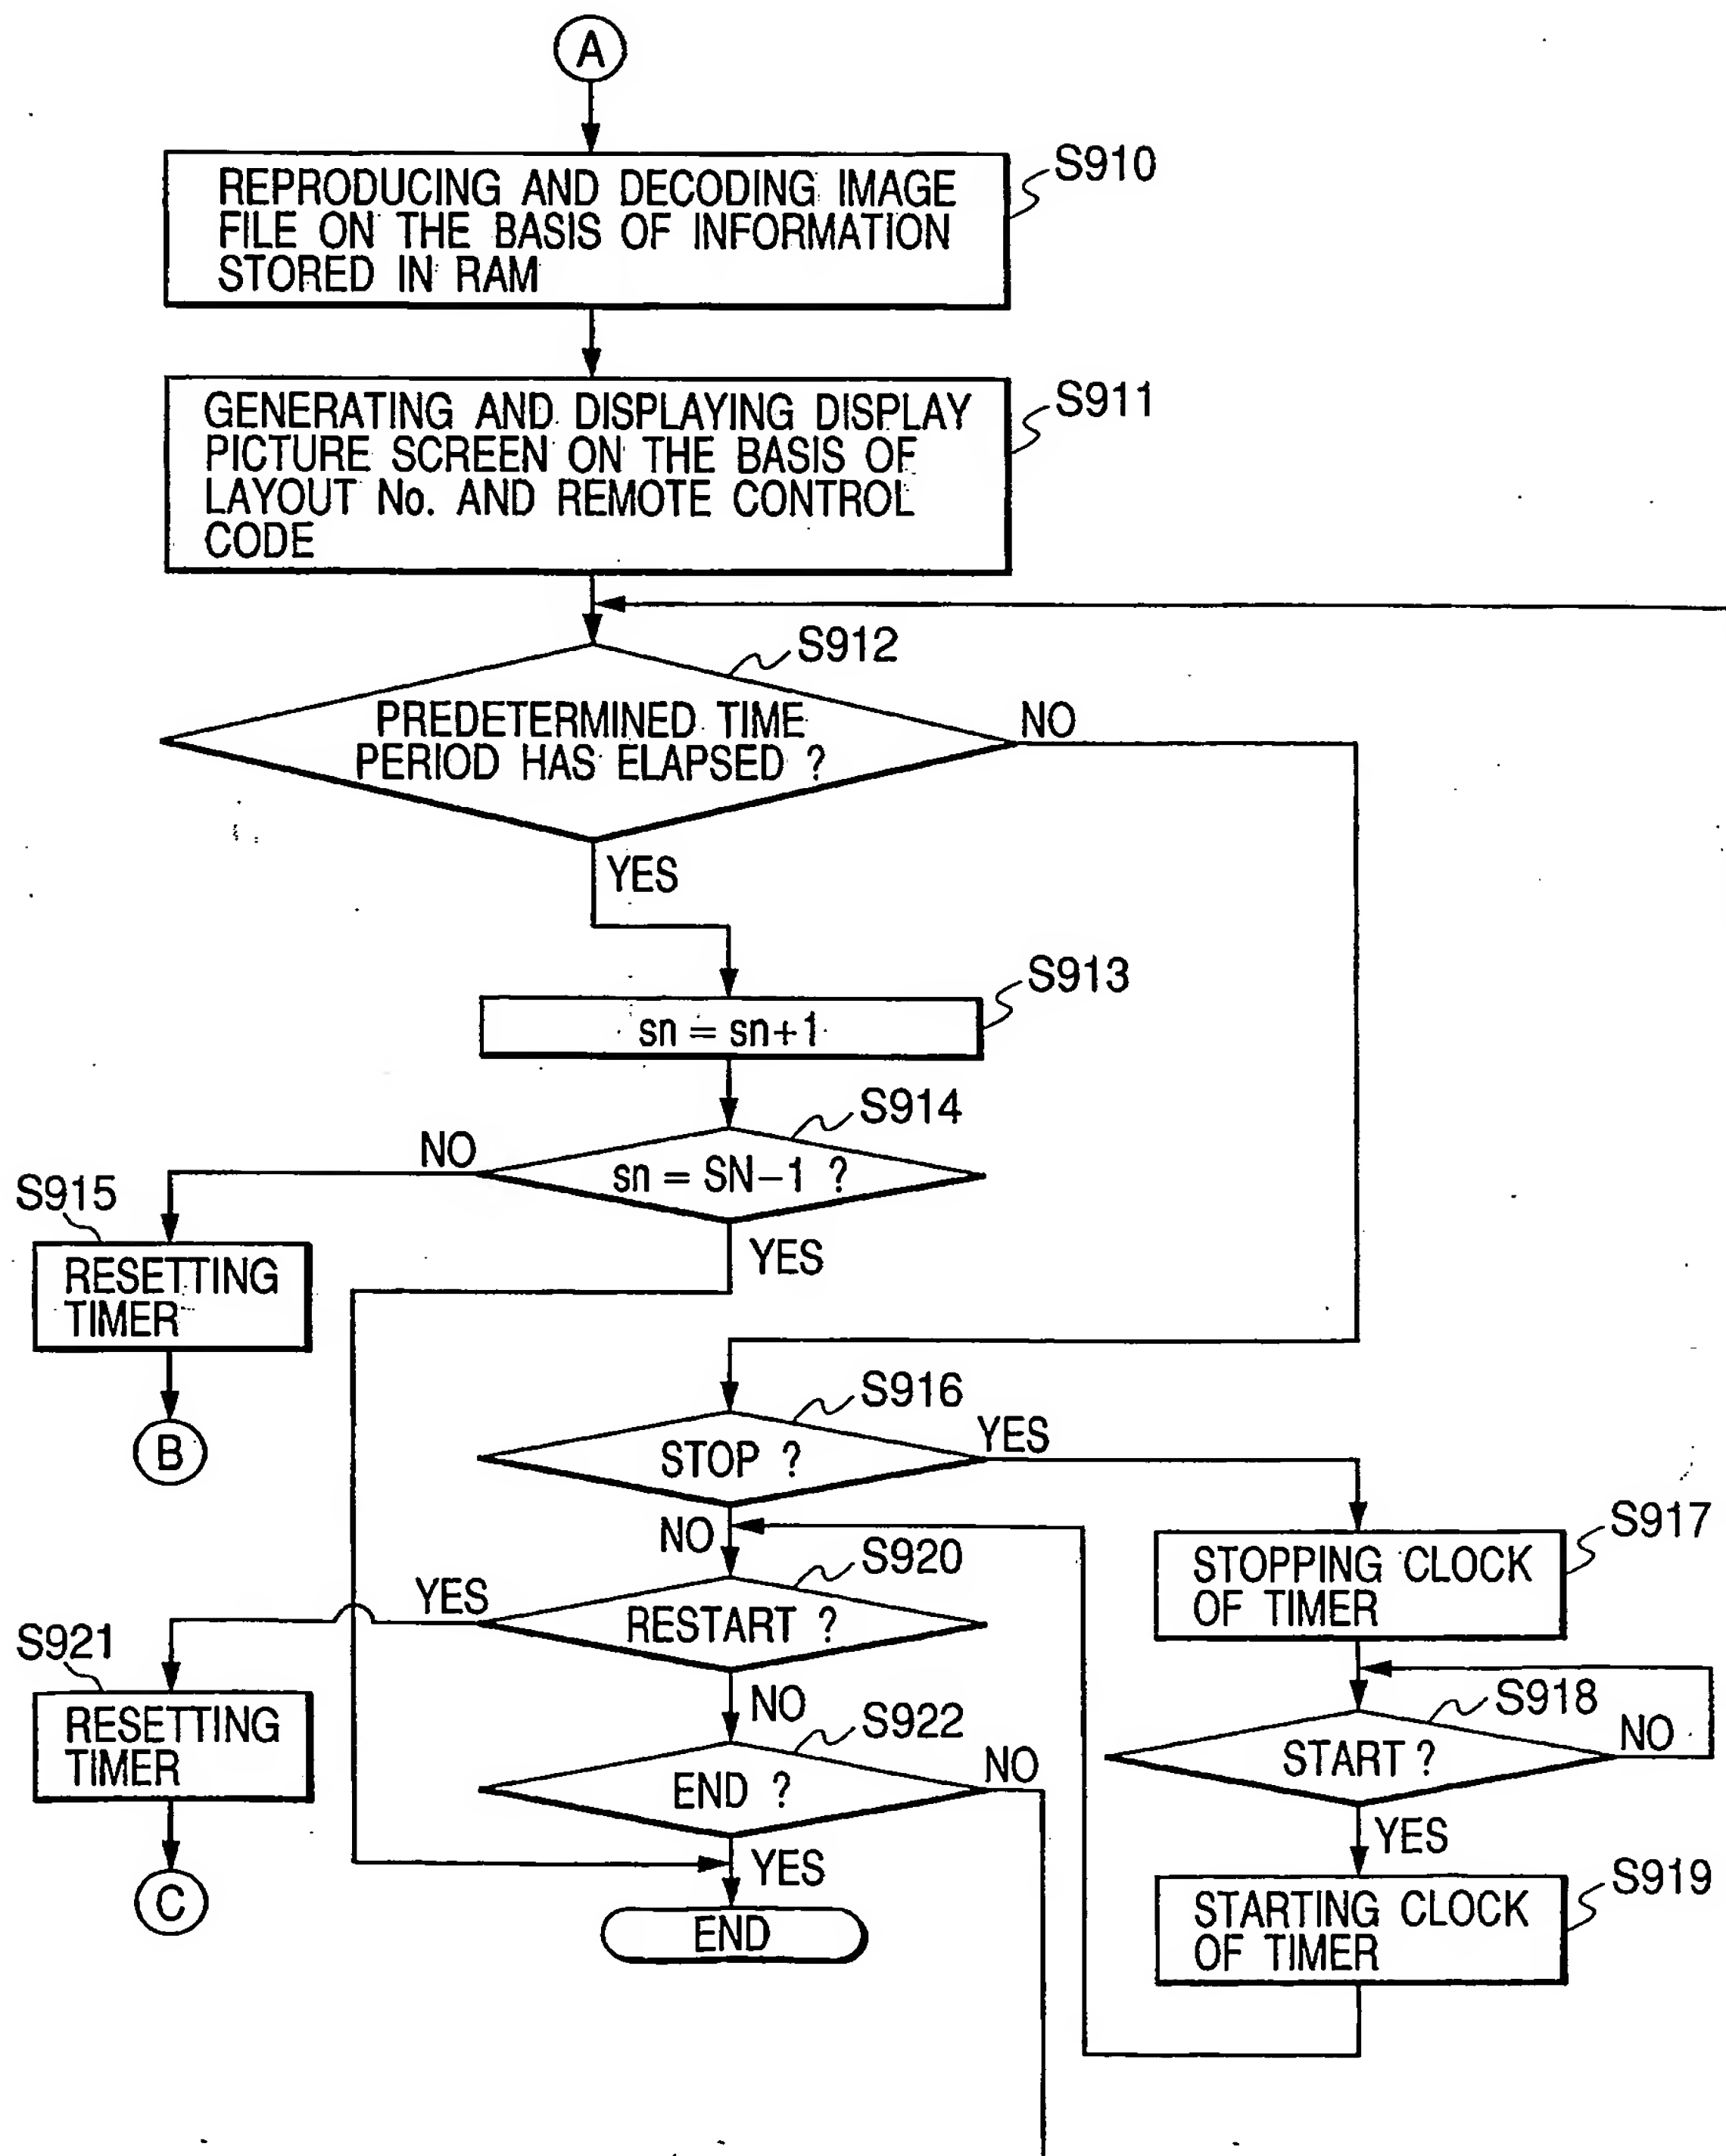
FIG. 9B

FIG. 10

FIG. 10A

FIG. 10B

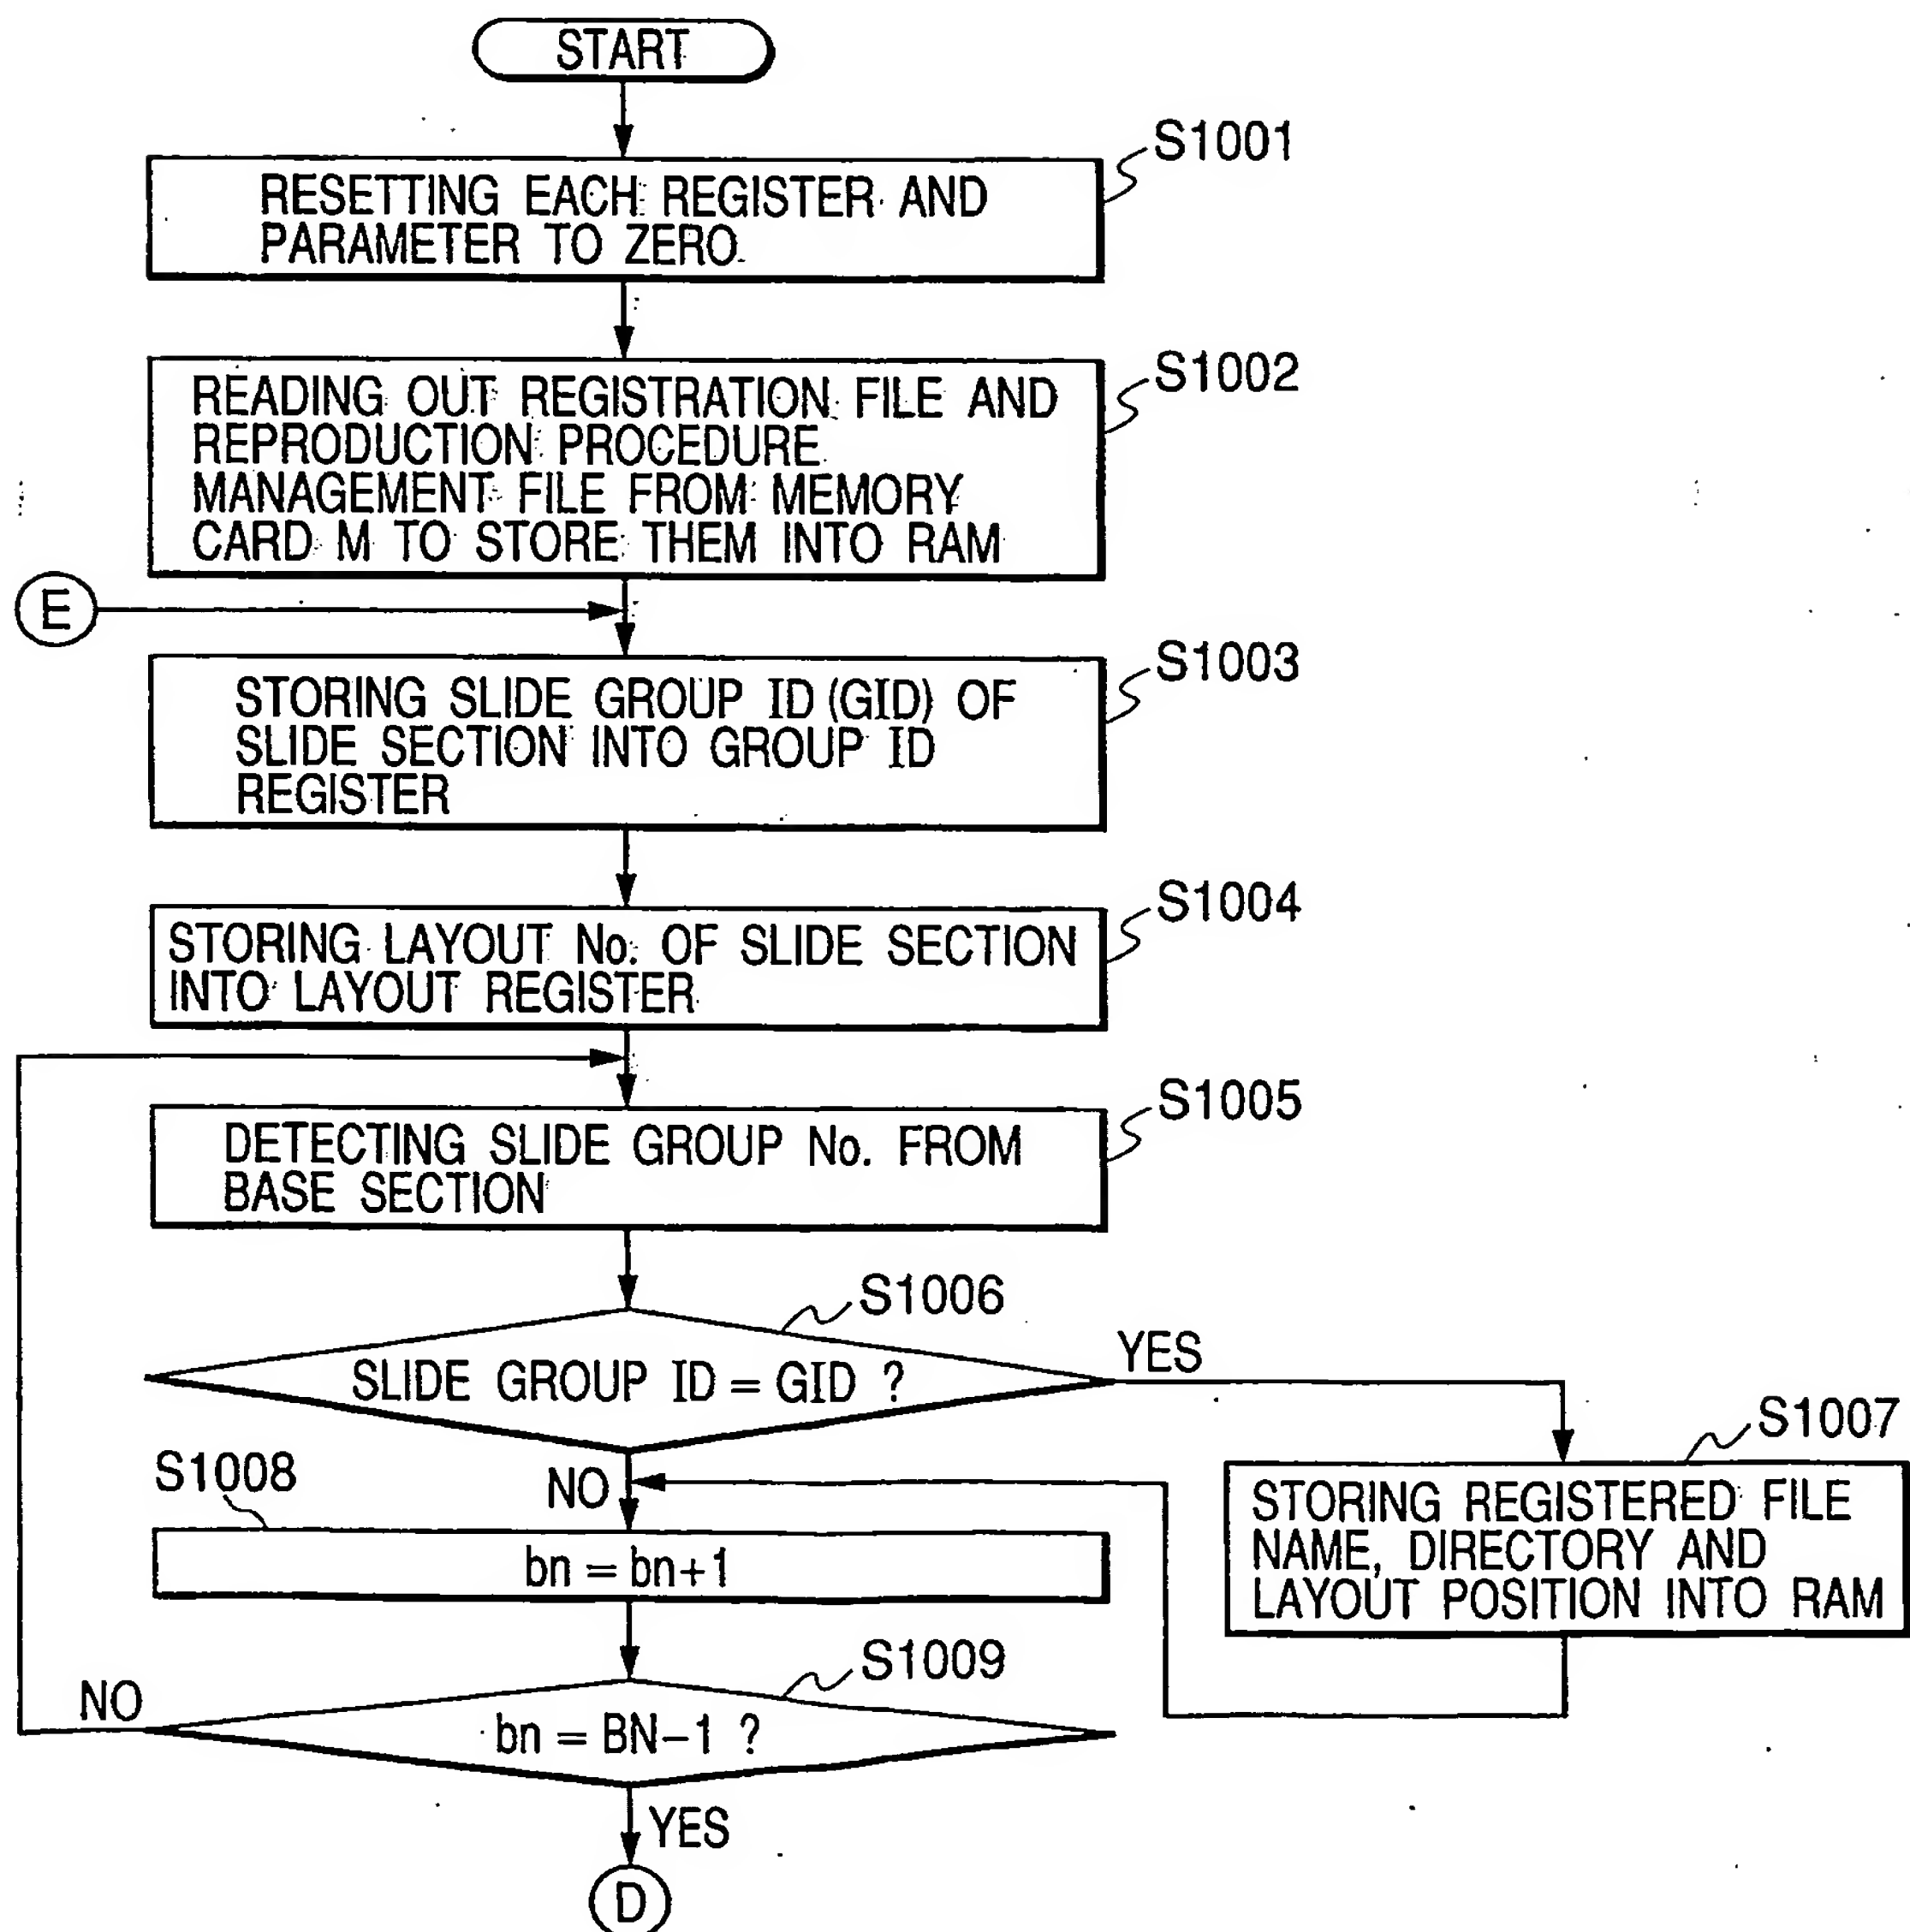
FIG. 10A


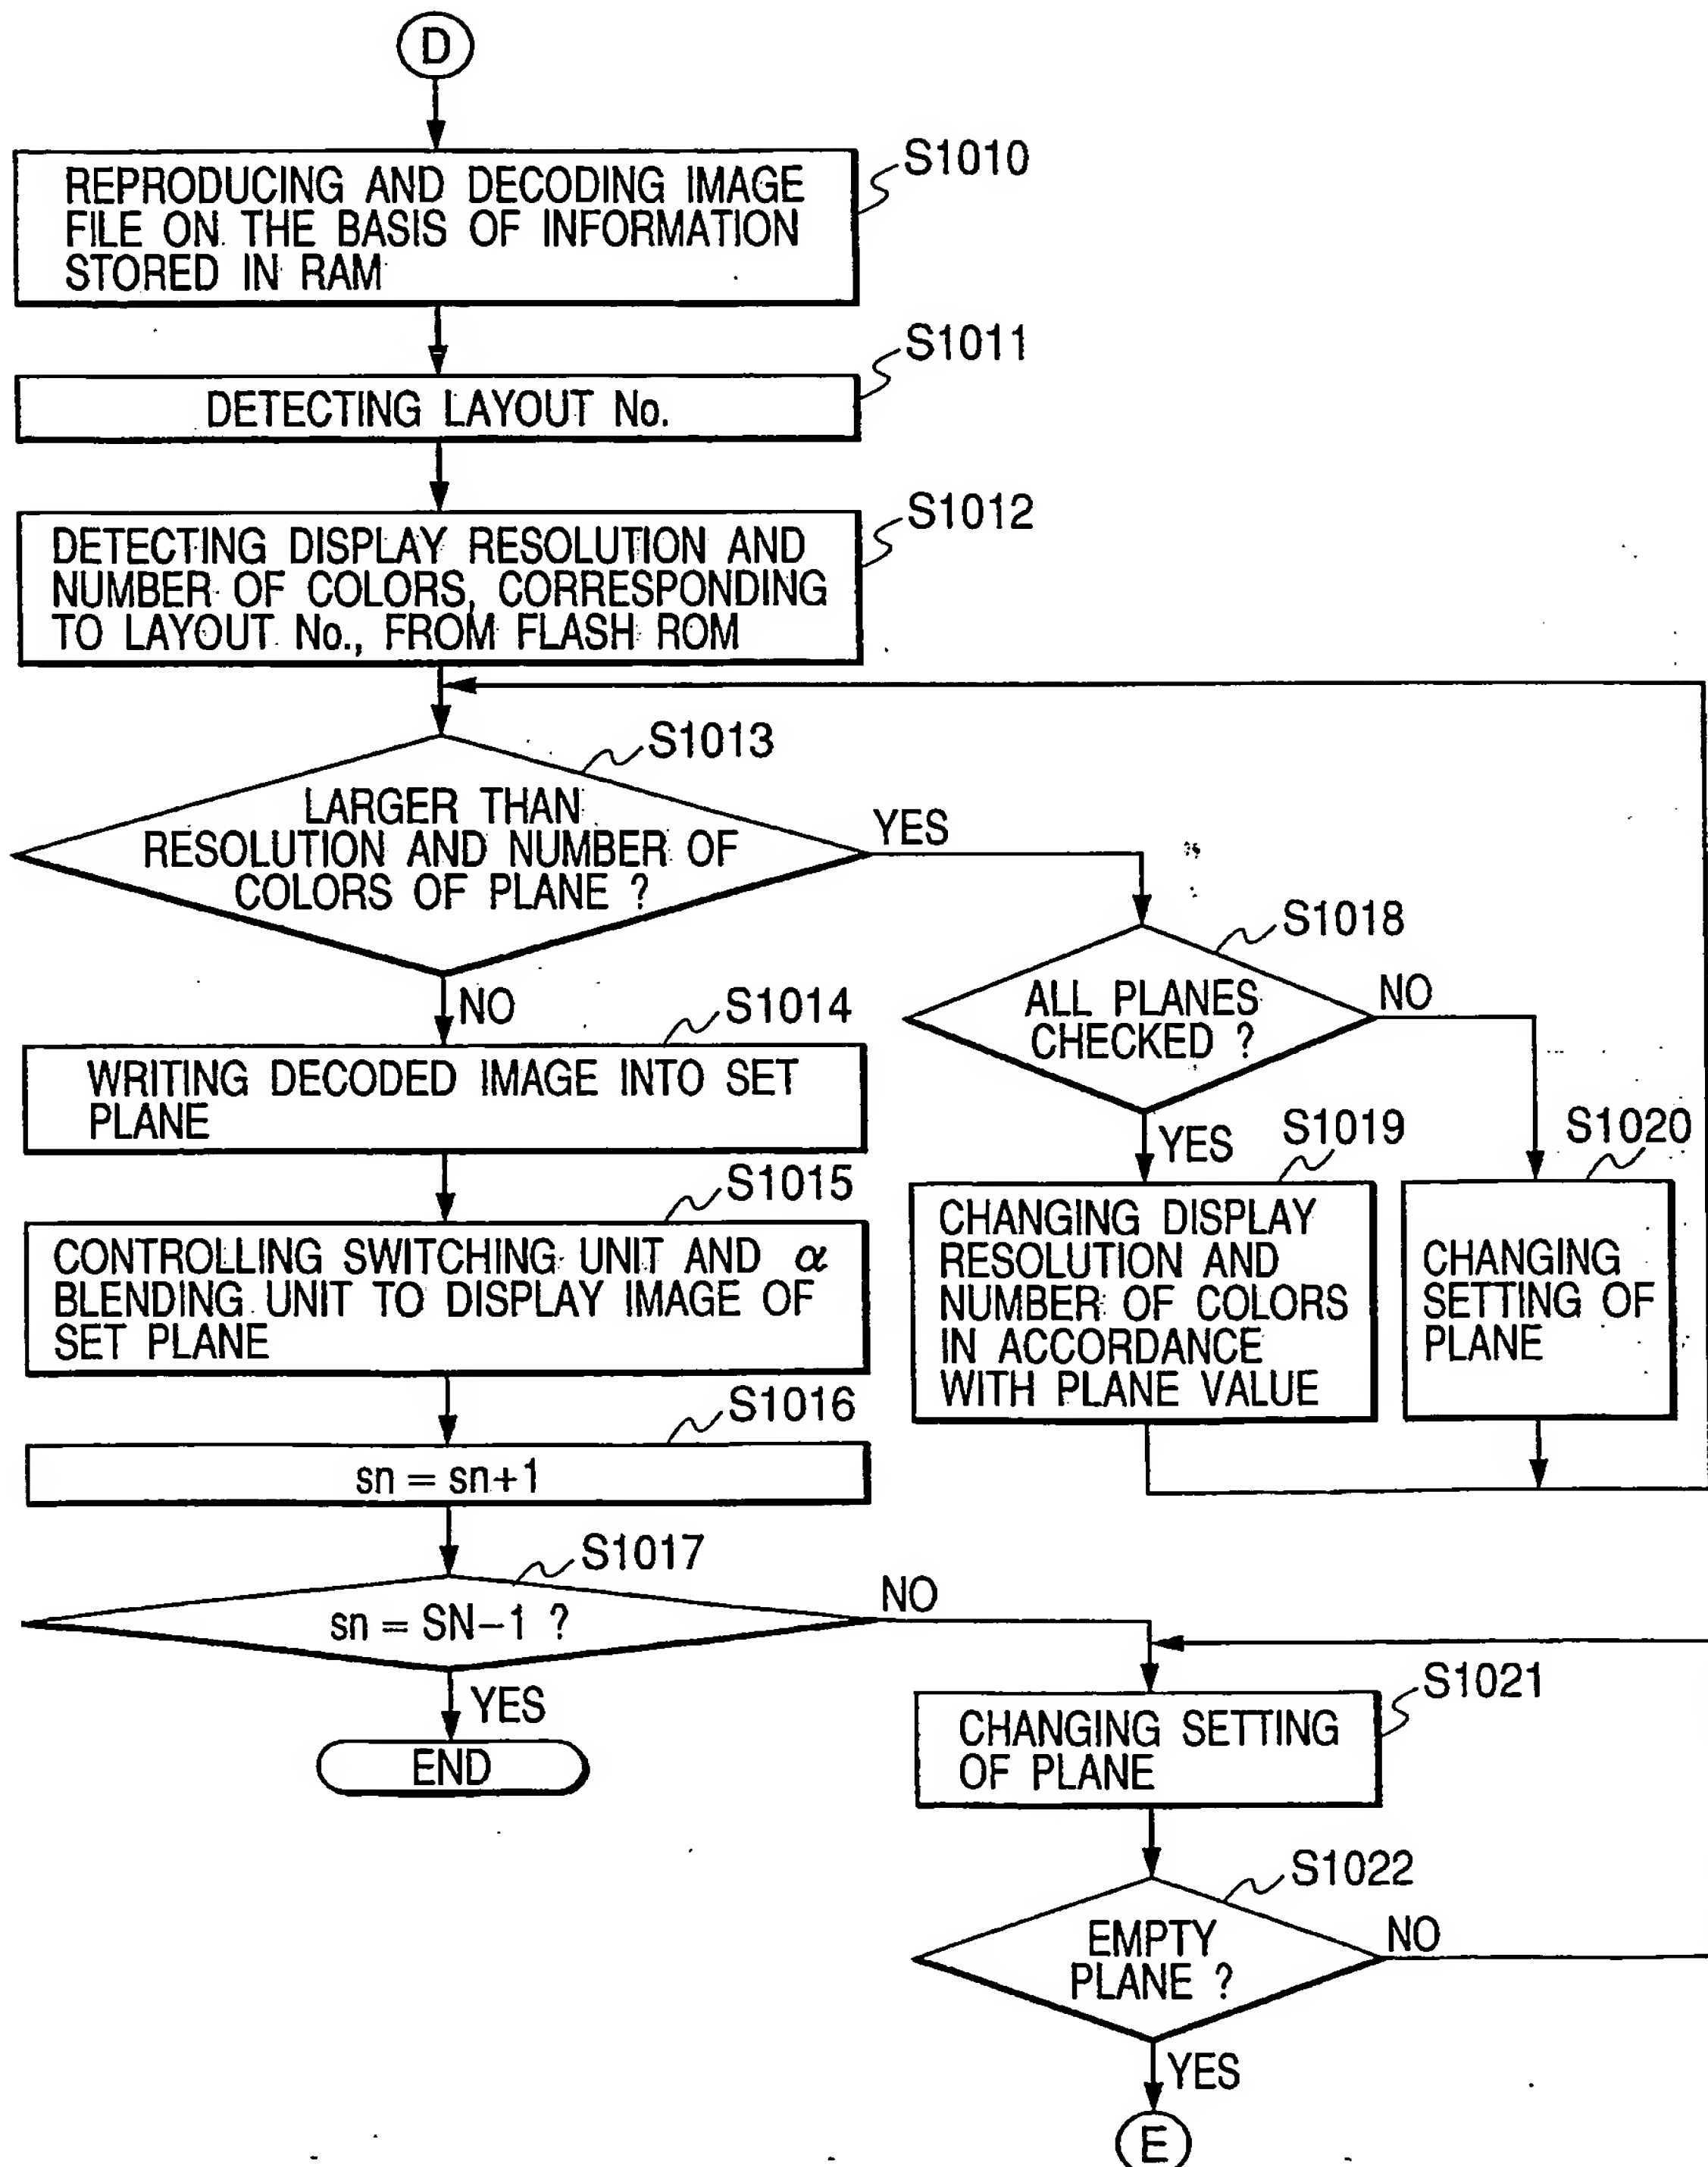
FIG. 10B

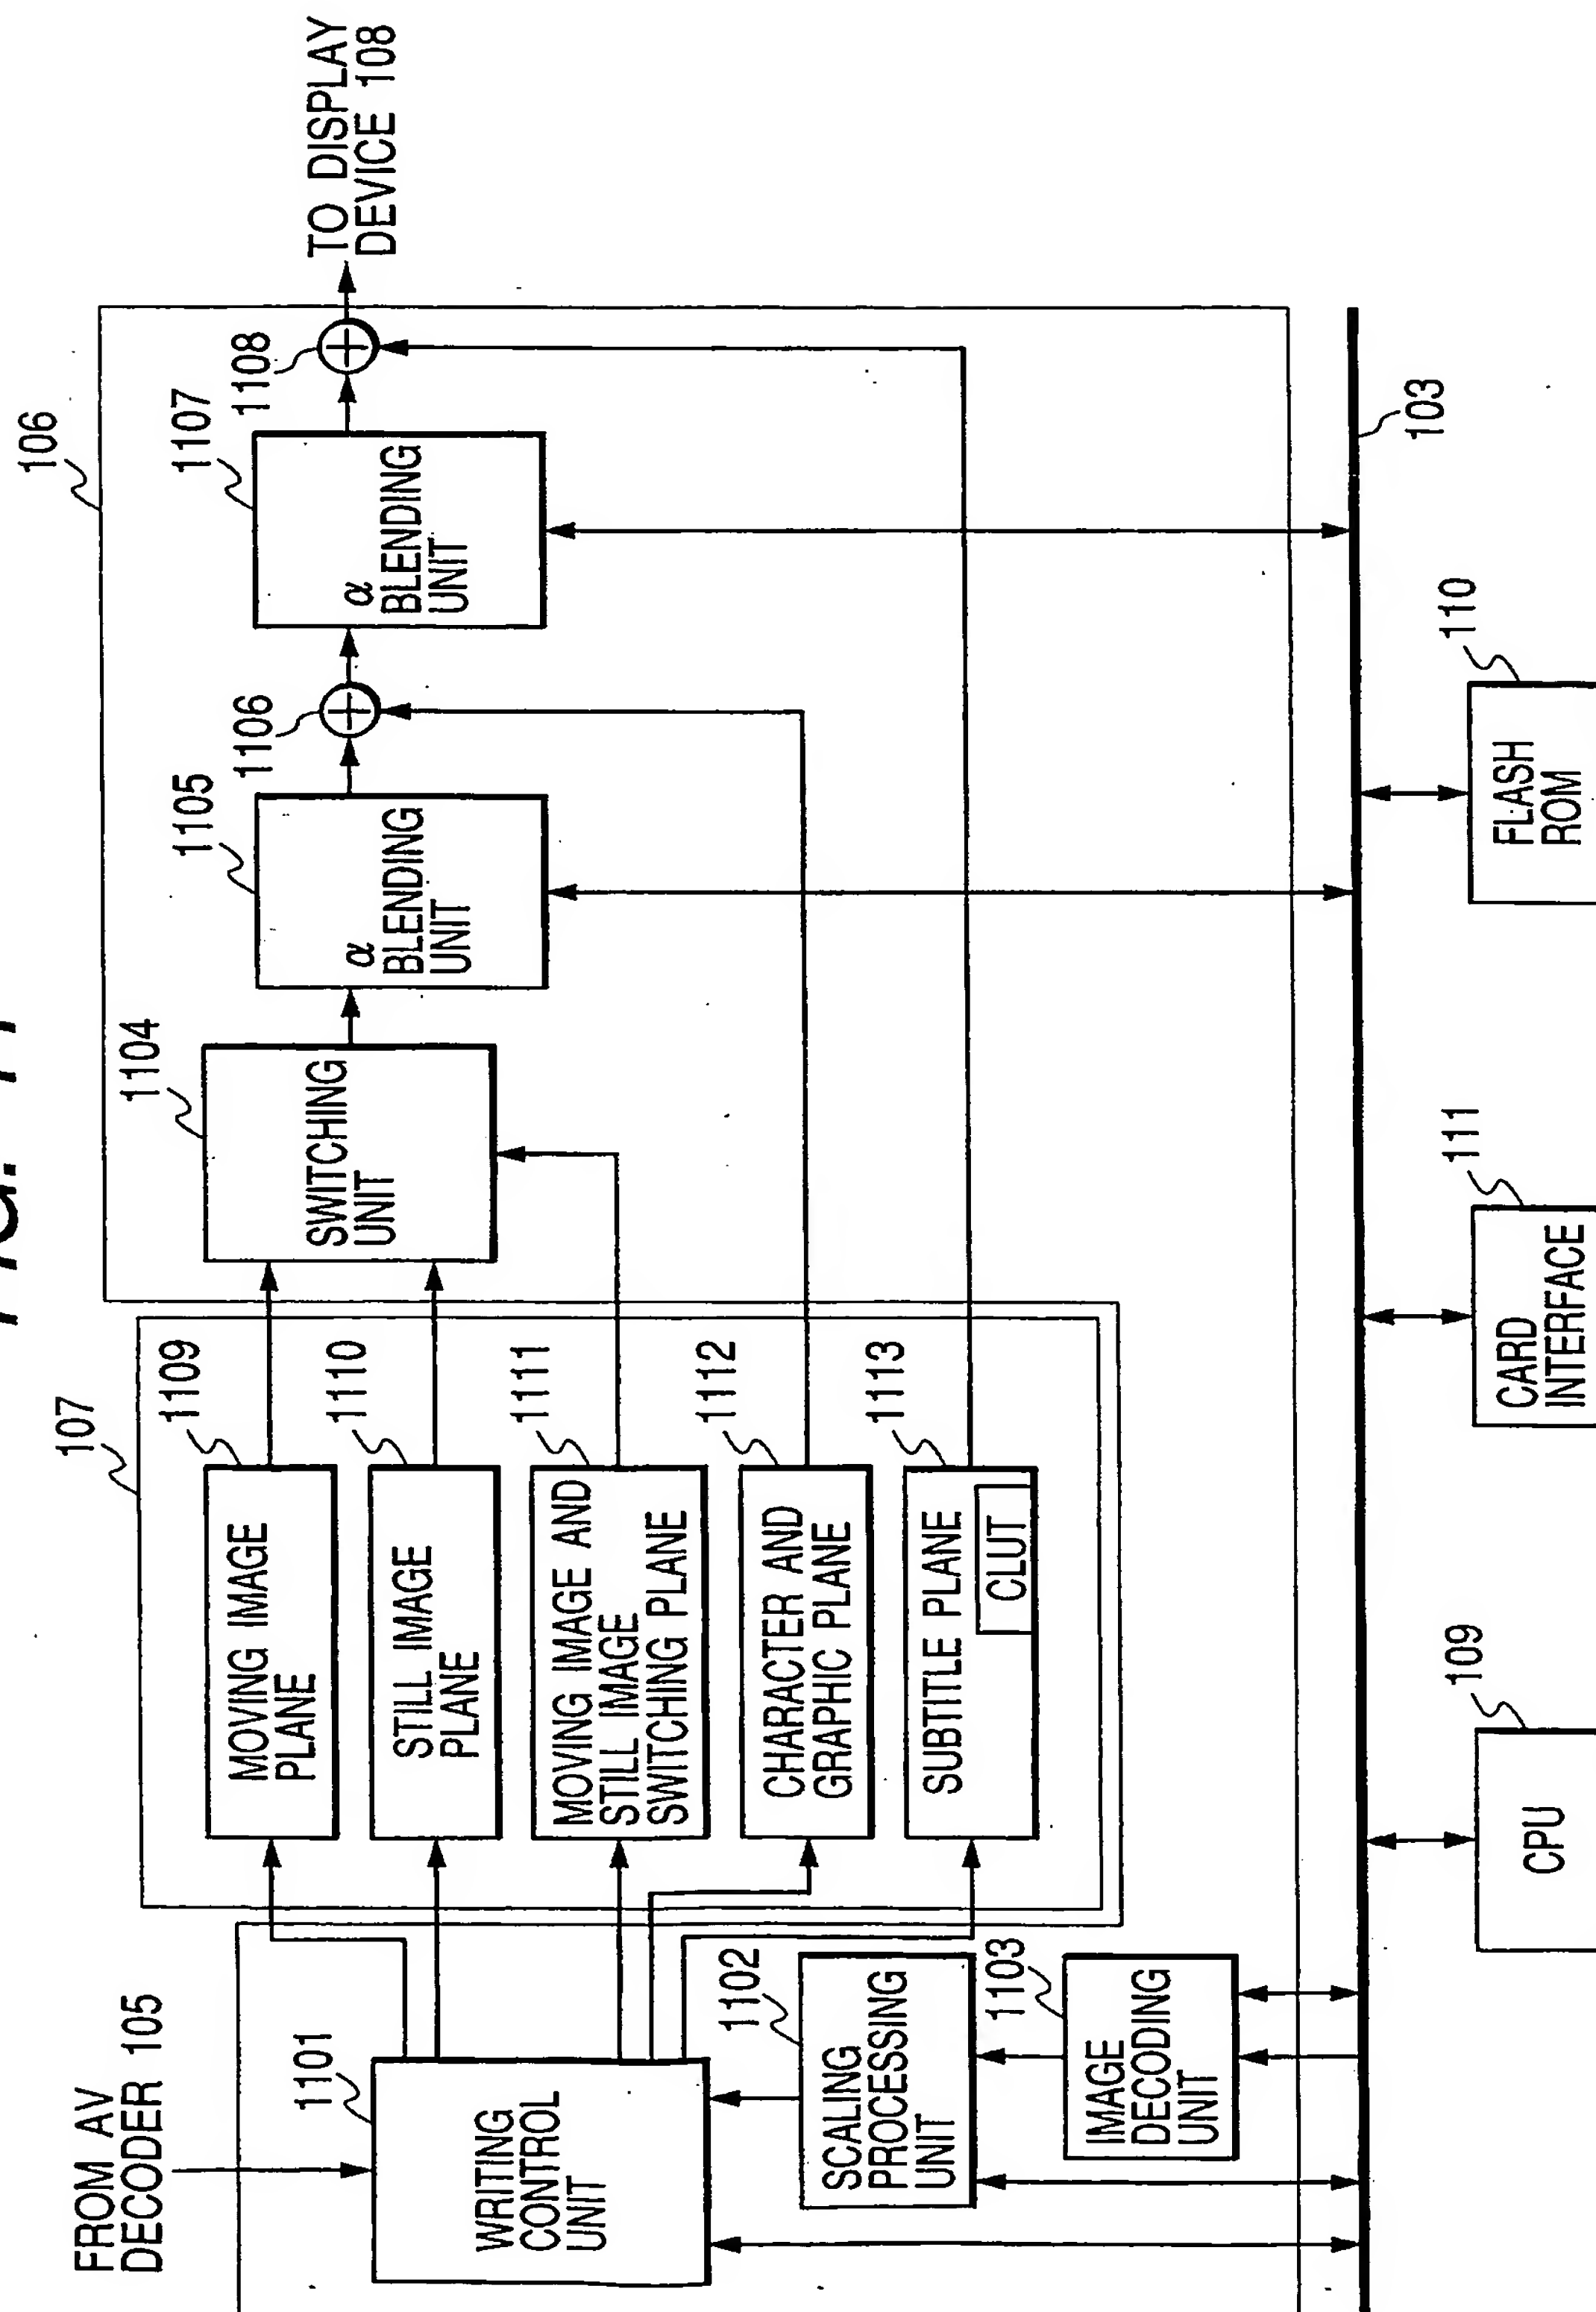FIG. 11



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number
WO 2003/063467 A3

(51) International Patent Classification⁷: H04N 1/21

(21) International Application Number:
PCT/JP2003/000348

(22) International Filing Date: 17 January 2003 (17.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
NO. 2002-012833 22 January 2002 (22.01.2002) JP

(71) Applicant (for all designated States except US): CANON
KABUSHIKI KAISHA [JP/JP]; 3-30-2, Shimomaruko,
Ohta-ku, Tokyo 146-8501 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MIYAMOTO,

Katsuhiro [JP/JP]; c/o CANON KABUSHIKI KAISHA,
3-30-2, Shimomaruko, Ohta-ku, Tokyo 146-8501 (JP). YA-
MAMOTO, Takashi [JP/JP]; c/o CANON KABUSHIKI
KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo
146-8501 (JP).

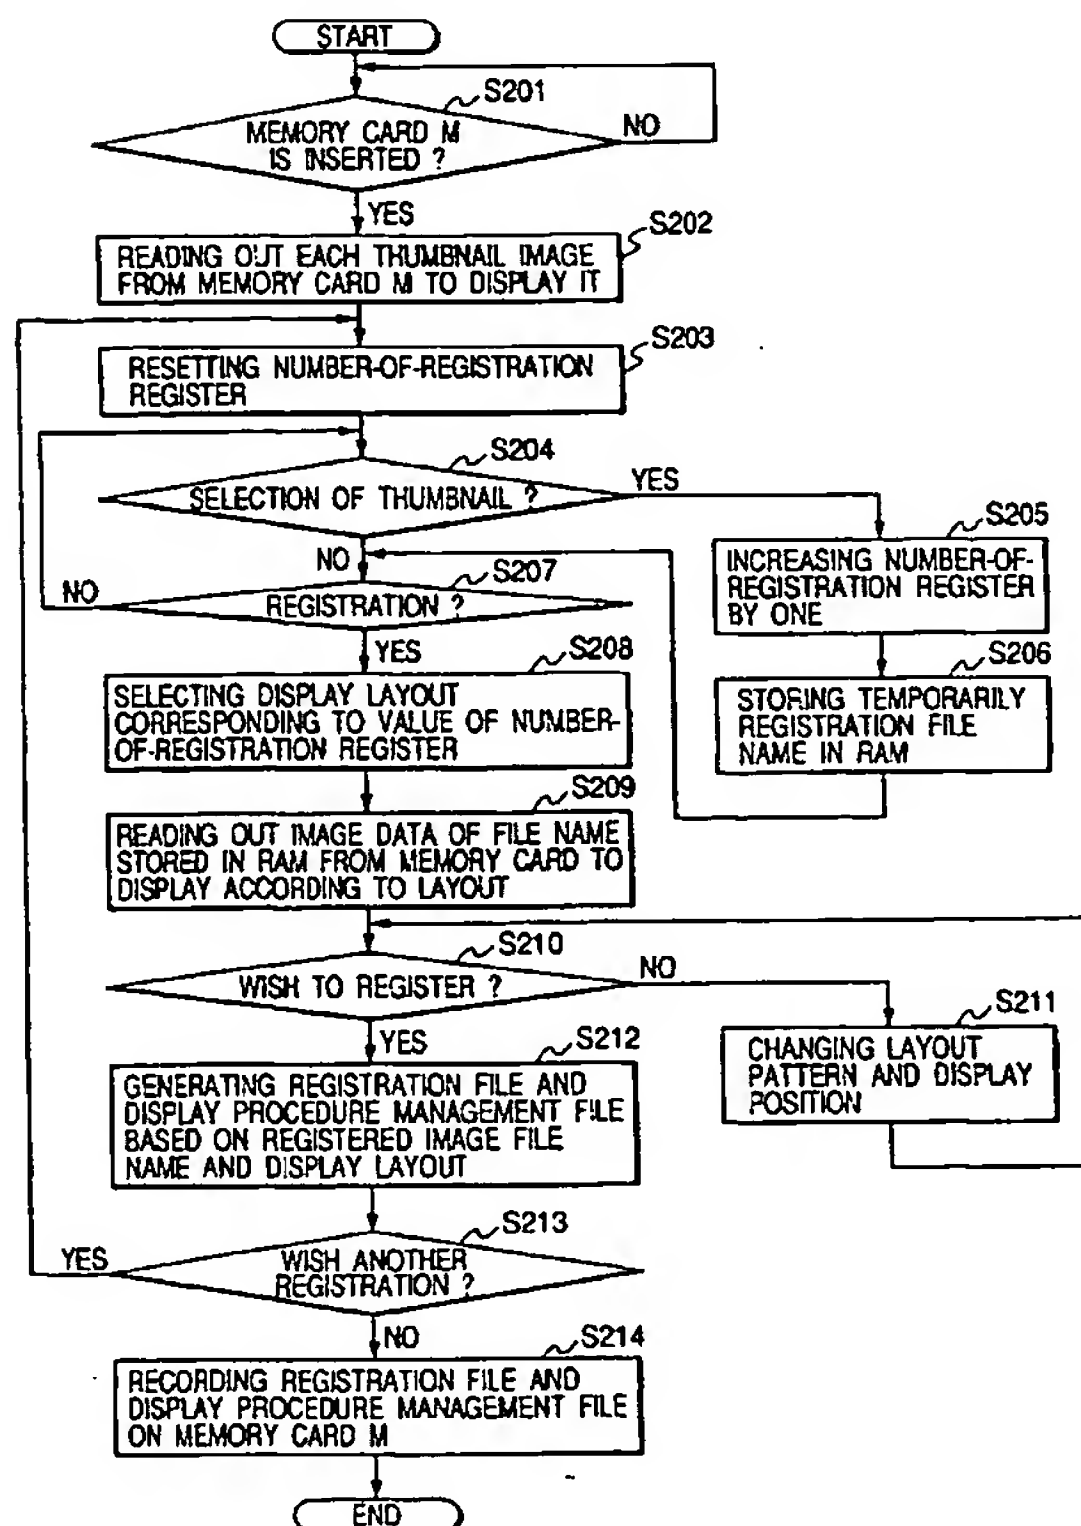
(74) Agents: OKABE, Masao et al.; No. 602, Fuji Bldg., 2-3,
Marunouchi 3-chome, Chiyoda-ku, Tokyo 100-0005 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: IMAGE PROCESSING APPARATUS



(57) Abstract: A signal processing apparatus, the operation of which is controlled by a remote controller, designates procedure for reproducing an image signal stored on a recording medium; allocates a reproduction function corresponding to the designated reproduction procedure to the operating key of the remote controller; generates reproduction management data that includes operating key information indicating the operating key to which the reproduction function is allocated, and reproduction procedure information indicating the designated reproduction procedure; and writes the reproduction procedure management information to the recording medium.

WO 2003/063467 A3

WO 2003/063467 A3



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(88) Date of publication of the international search report:

15 April 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/JP 03/00348

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N1/21

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 241 659 A (FUNSTON DAVID L ET AL) 31 August 1993 (1993-08-31)	1, 11-13, 16-19
A	the whole document	14, 15
A	US 5 353 063 A (WATANABE IKUO ET AL) 4 October 1994 (1994-10-04) column 6, line 25 - line 30	14, 15

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

13 October 2003

Date of mailing of the international search report

04 12 2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Yvonnet, J

INTERNATIONAL SEARCH REPORT

International application No.
PCT/JP 03/00348

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-13,16-19

signal processing method and apparatus for reproduction
procedure management information

2. Claims: 14-15

television broadcast receiver with a moving image memory
plane and a still image memory plane

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP 03/00348

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5241659	A	31-08-1993	AU 8654991 A	15-04-1992
			BR 9105917 A	05-01-1993
			CA 2072973 A1	15-03-1992
			CN 1061503 A	27-05-1992
			CN 1063188 A	29-07-1992
			CZ 9201421 A3	14-04-1993
			DE 69128707 D1	19-02-1998
			DE 69128707 T2	16-07-1998
			EP 0503041 A1	16-09-1992
			JP 5502571 T	28-04-1993
			MX 173444 B	03-03-1994
			MX 9101109 A1	04-05-1992
			MX 9101110 A1	04-05-1992
			WO 9205654 A1	02-04-1992
US 5353063	A	04-10-1994	JP 3289280 A	19-12-1991
			JP 3391786 B2	31-03-2003
			JP 3249507 B2	21-01-2002
			JP 3289283 A	19-12-1991